



Characteristic Curves

TMM 24105 TMM 24105C


Efficiency vs Output Load

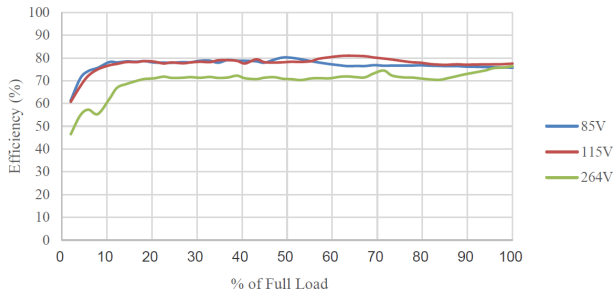


Efficiency vs Input Voltage

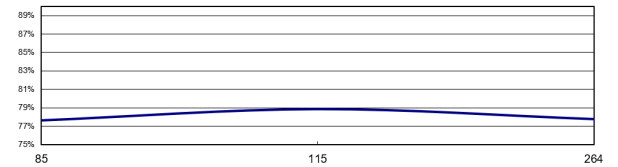


Derating Output Load versus Ambient Temperature

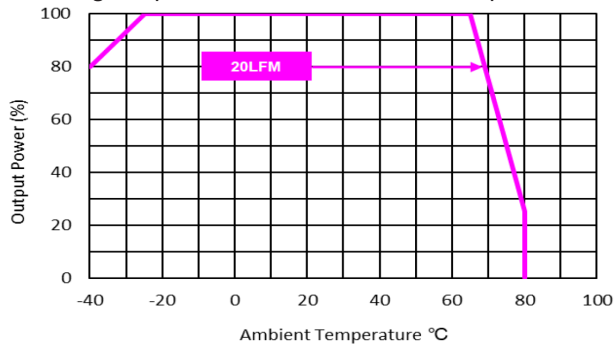


Typical Output Ripple and Noise

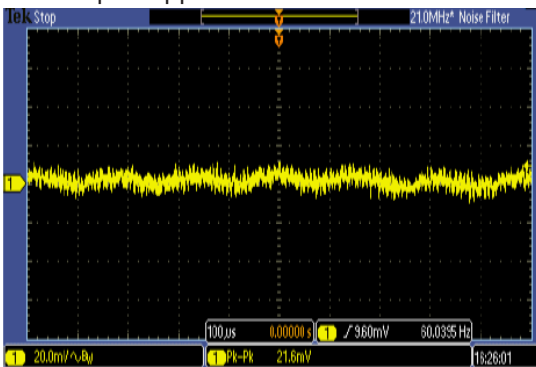

Transient Response to Dynamic Load Change (25%)

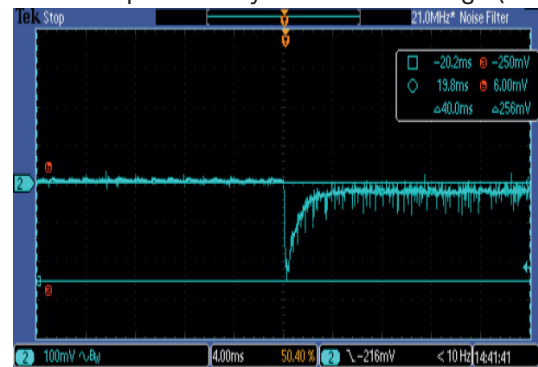


Typical Input Start-Up and Output Rise Characteristic

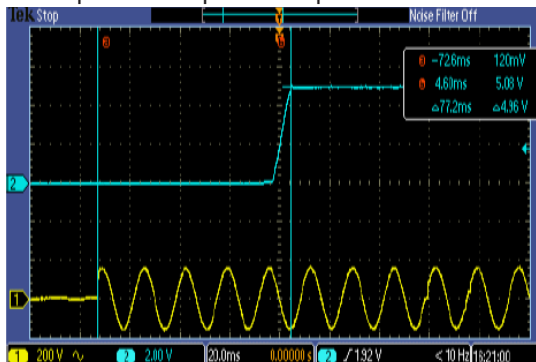


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

TMM 24112 TMM 24112C


Efficiency vs Output Load

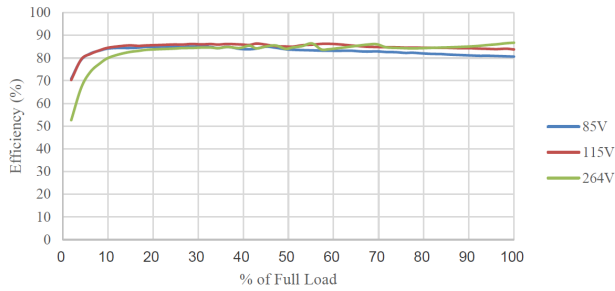


Efficiency vs Input Voltage

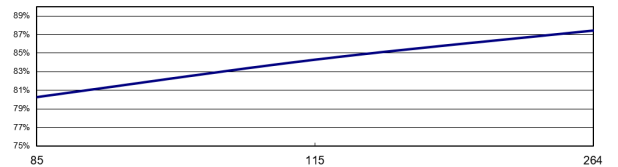


Derating Output Load versus Ambient Temperature

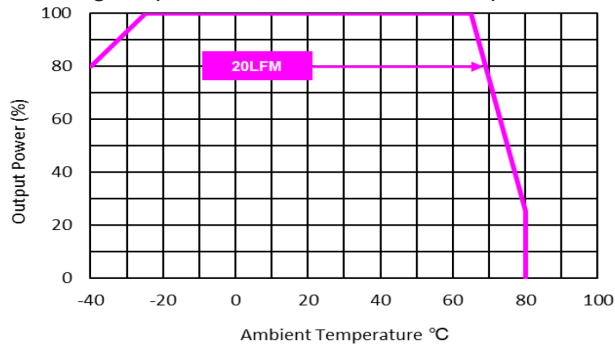


Typical Output Ripple and Noise

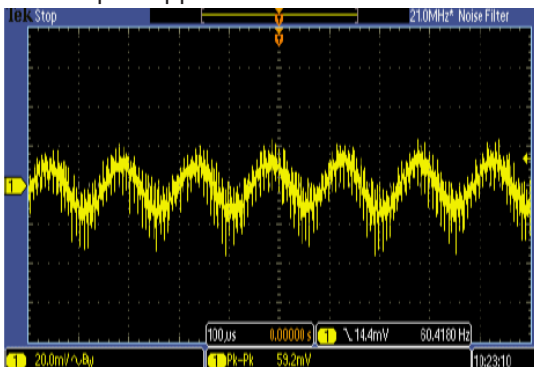

Transient Response to Dynamic Load Change (25%)

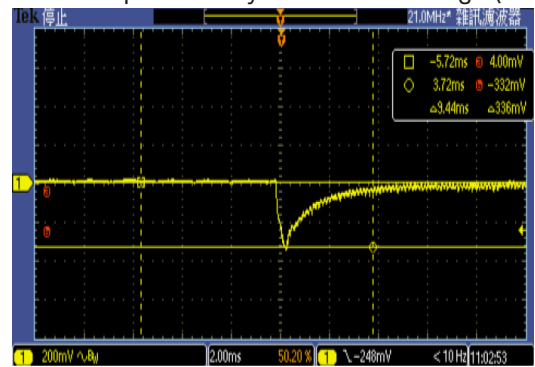


Typical Input Start-Up and Output Rise Characteristic

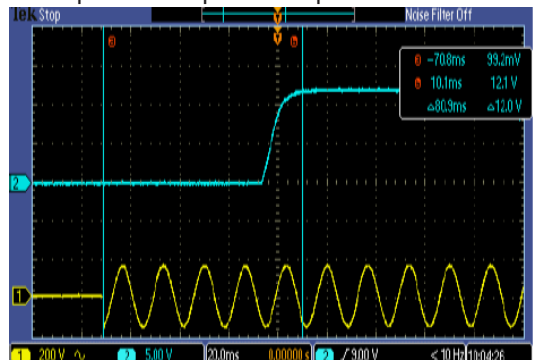


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

TMM 24115 TMM 24115C


Efficiency vs Output Load

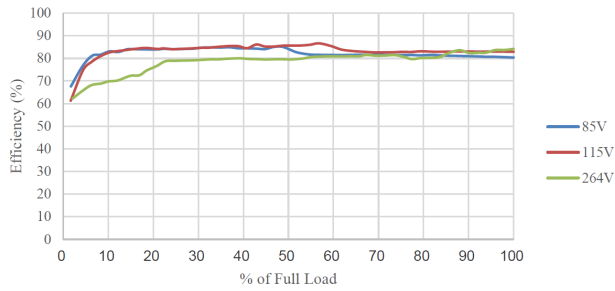

Efficiency vs Input Voltage

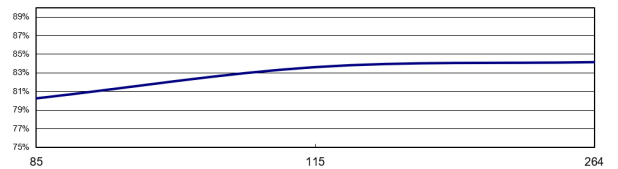


Derating Output Load versus Ambient Temperature

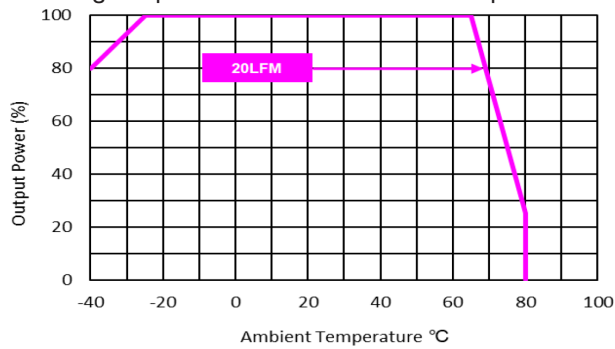

Typical Output Ripple and Noise



Transient Response to Dynamic Load Change (25%)

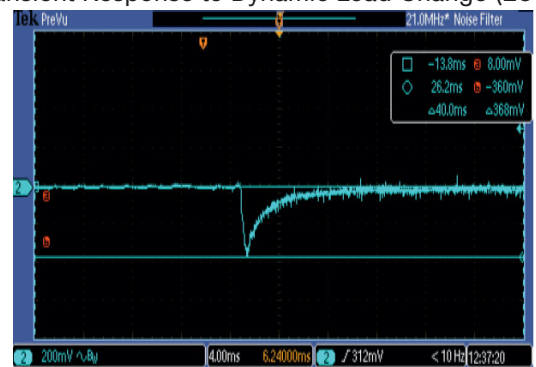


Typical Input Start-Up and Output Rise Characteristic




All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

TMM 24124 TMM 24124C


Efficiency vs Output Load

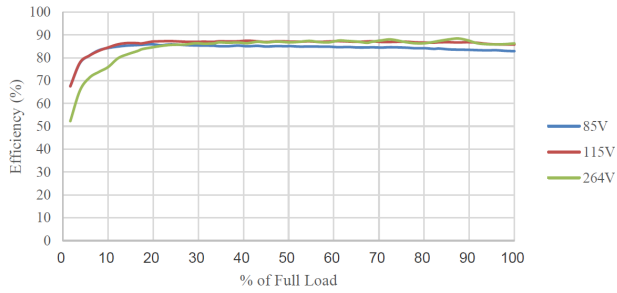

Efficiency vs Input Voltage

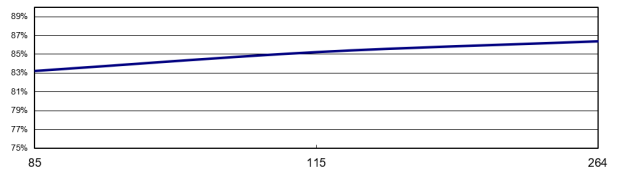

Derating Output Load versus Ambient Temperature

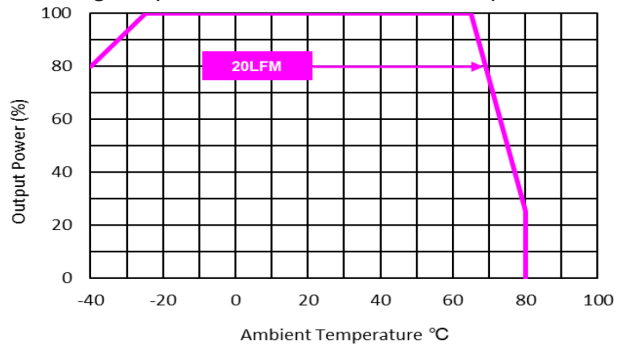


Typical Output Ripple and Noise



Transient Response to Dynamic Load Change (25%)




Typical Input Start-Up and Output Rise Characteristic

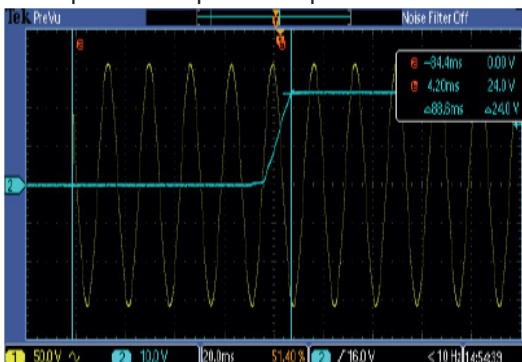


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

TMM 24212 TMM 24212C


Efficiency vs Output Load

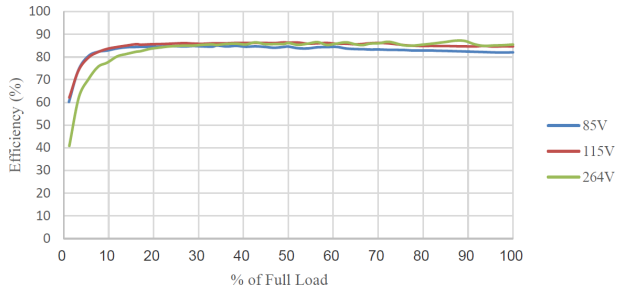

Efficiency vs Input Voltage

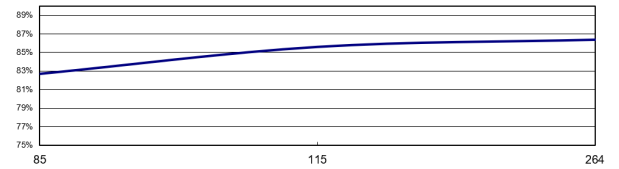


Derating Output Load versus Ambient Temperature

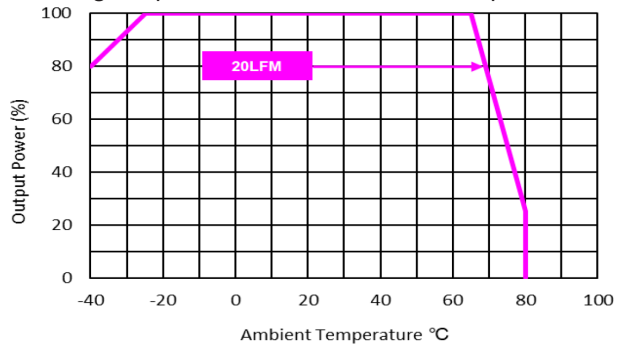


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

TMM 24212 TMM 24212C


Typical Output Ripple and Noise (Output 1)

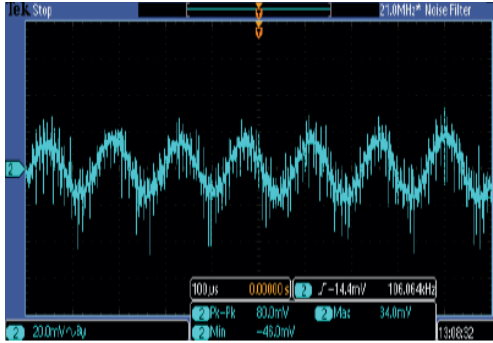


Typical Output Ripple and Noise (Output 2)

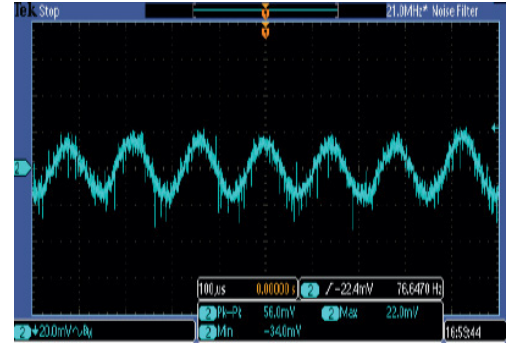

Typical Input Start-Up and Output Rise Characteristic (Output 1)

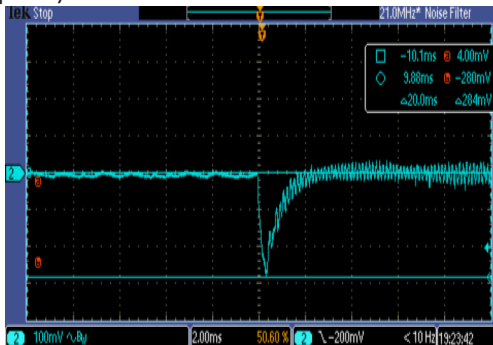


Typical Input Start-Up and Output Rise Characteristic (Output 2)

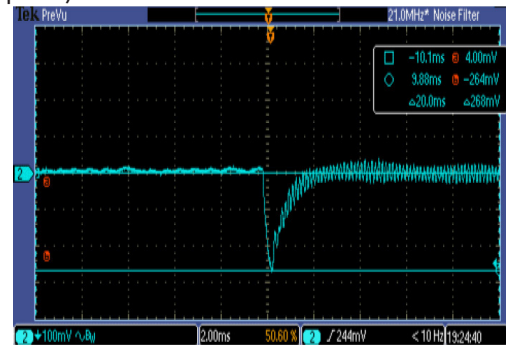

Transient Response to Dynamic Load Change (25%) (Output 1)




Transient Response to Dynamic Load Change (25%) (Output 2)

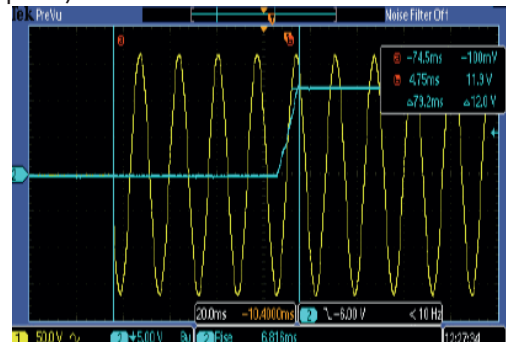


TMM 24215
TMM 24215C


Efficiency vs Output Load

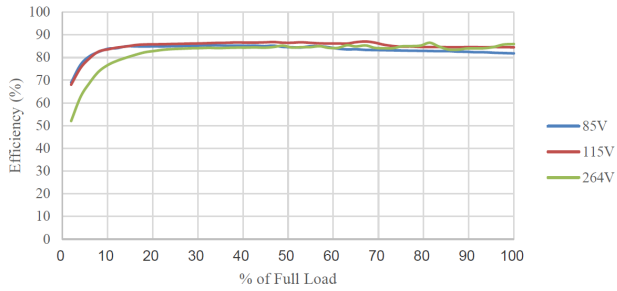

Efficiency vs Input Voltage

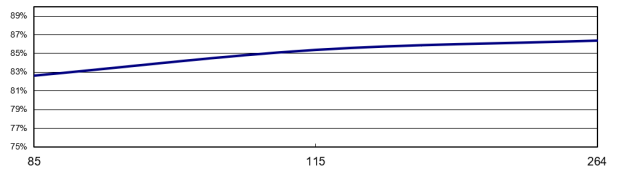


Derating Output Load versus Ambient Temperature

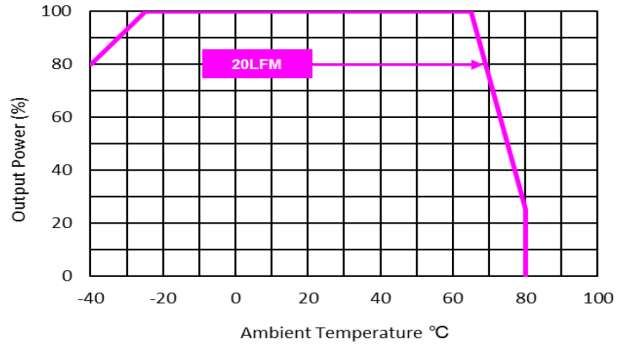


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

TMM 24215 TMM 24215C


Typical Output Ripple and Noise (Output 1)

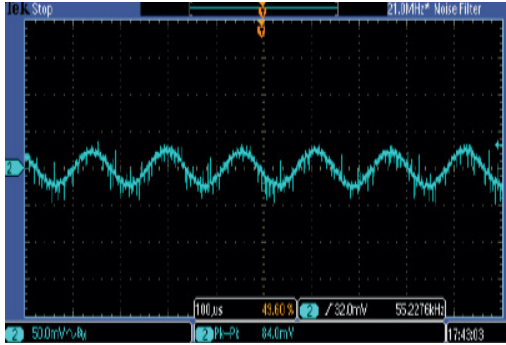

Typical Output Ripple and Noise (Output 2)

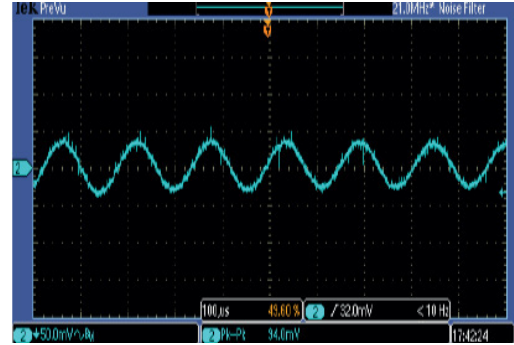


Typical Input Start-Up and Output Rise Characteristic (Output 1)

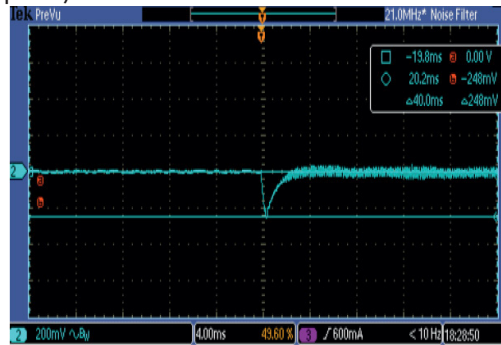


Typical Input Start-Up and Output Rise Characteristic (Output 2)



Transient Response to Dynamic Load Change (25%) (Output 1)

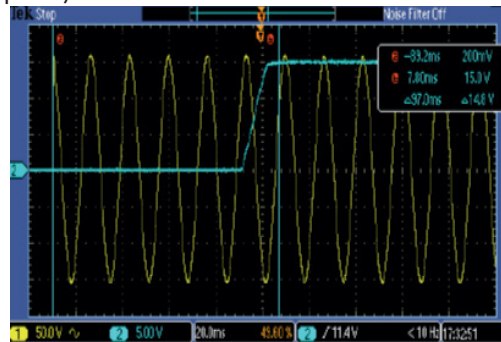

Transient Response to Dynamic Load Change (25%) (Output 2)

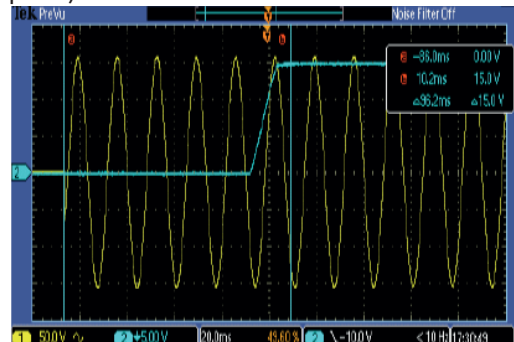

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.