



Characteristic Curves

TXLN 025-103


Efficiency versus Output Load

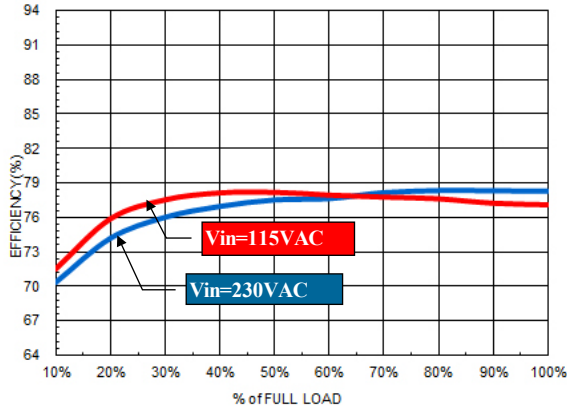


Efficiency versus Input Voltage

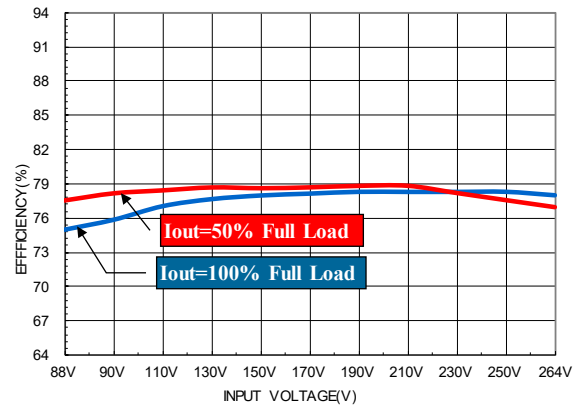


Derating Output Load versus Ambient Temperature

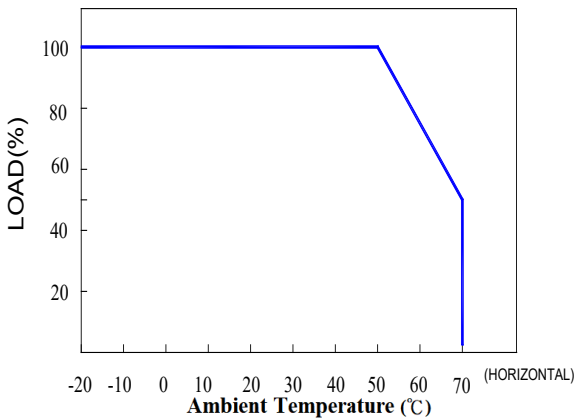


Derating Output Load versus Input Voltage

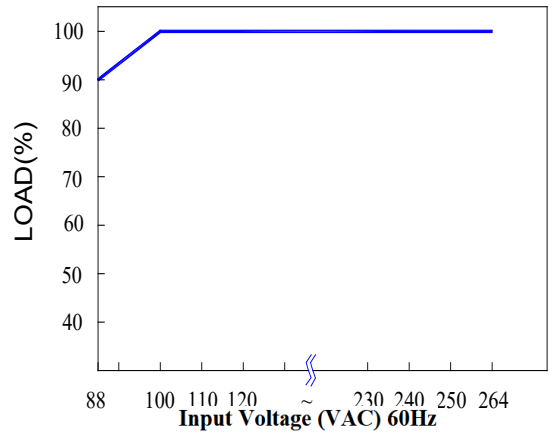

Typical Output Ripple and Noise at 115 Vin (with external capacitor; see datasheet)

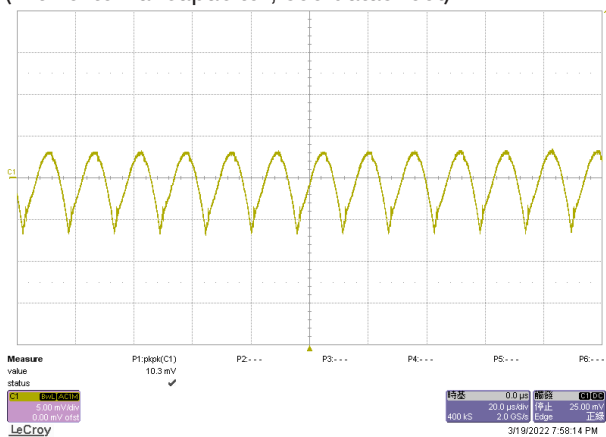


Typical Output Ripple and Noise at 230 Vin (with external capacitor; see datasheet)

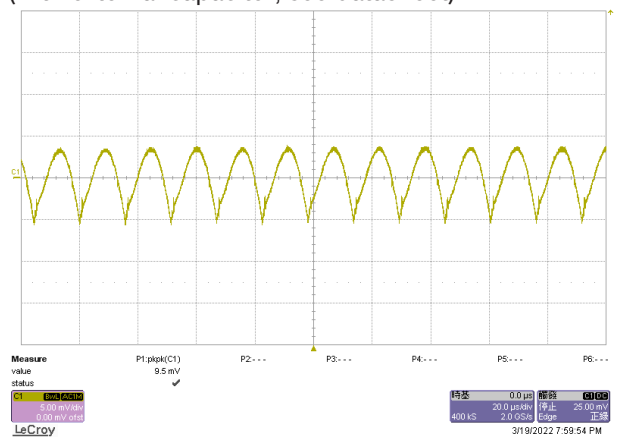


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

TXLN 025-103


Transient Response to Dynamic Load Change (25%) at 115 Vin

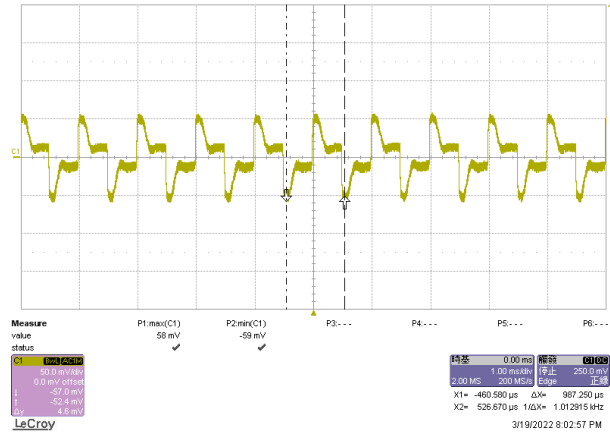


Transient Response to Dynamic Load Change (25%) at 230 Vin

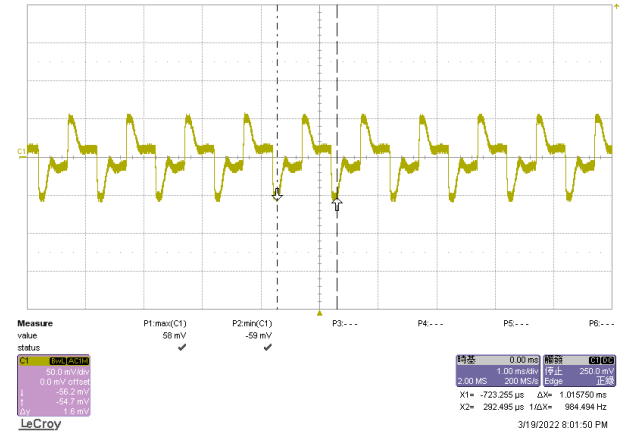


Typical Start-Up Characteristic at 115 Vin

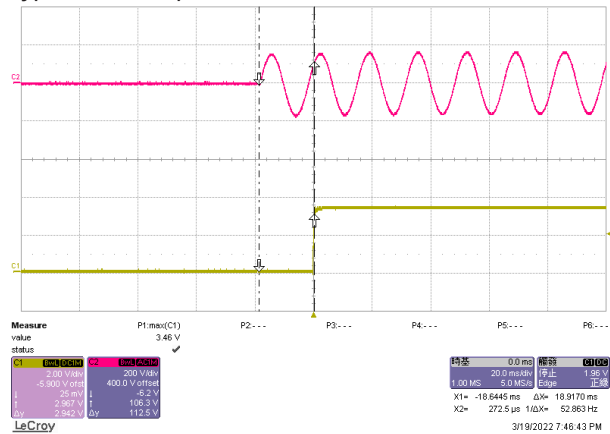


Typical Start-Up Characteristic at 230 Vin

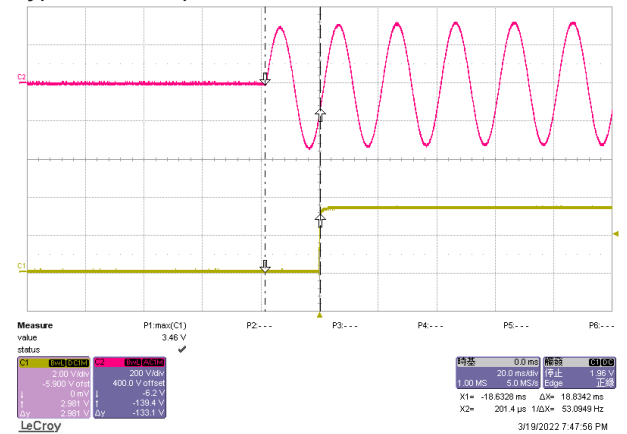

Typical Output Rise Characteristic at 115 Vin

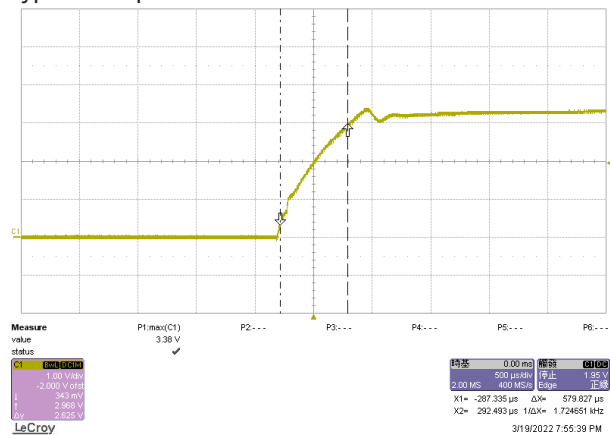


Typical Output Rise Characteristic at 230 Vin

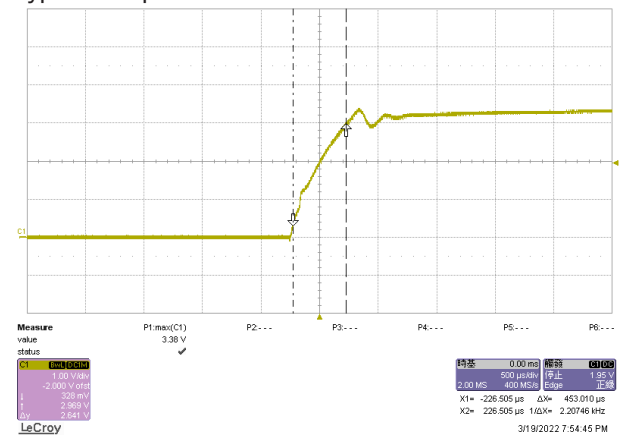


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

TXLN 025-103

Typical Hold-Up Characteristic at 115 Vin

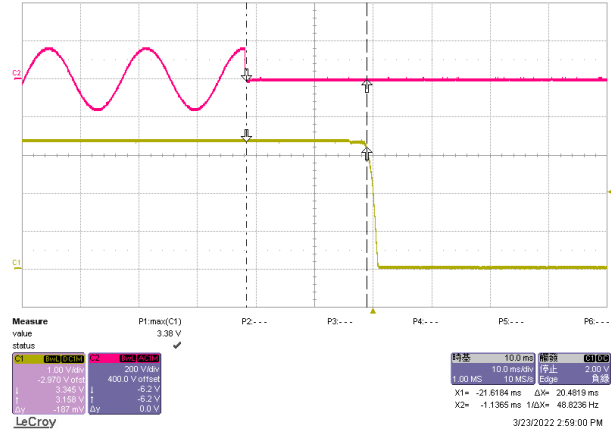


Typical Hold-Up Characteristic at 230 Vin

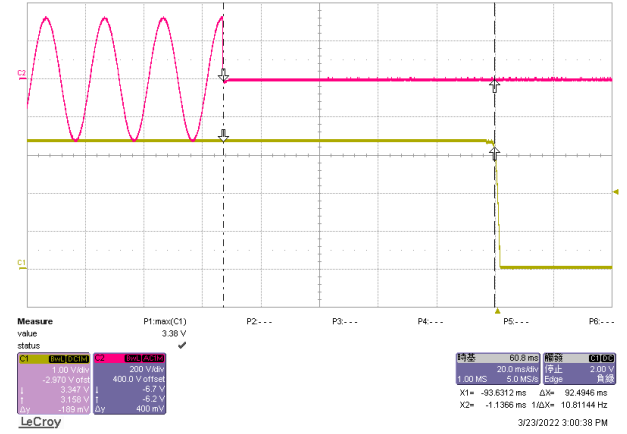


TXLN 025-105


Efficiency versus Output Load

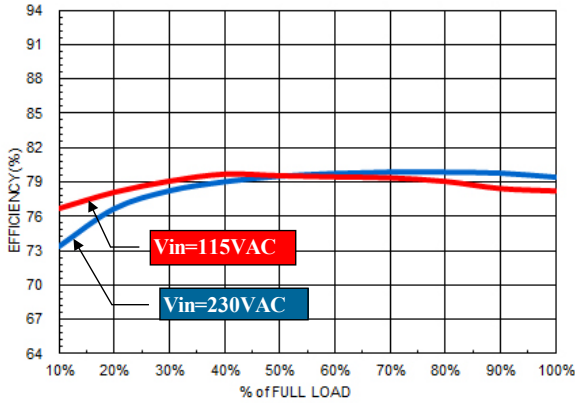


Efficiency versus Input Voltage

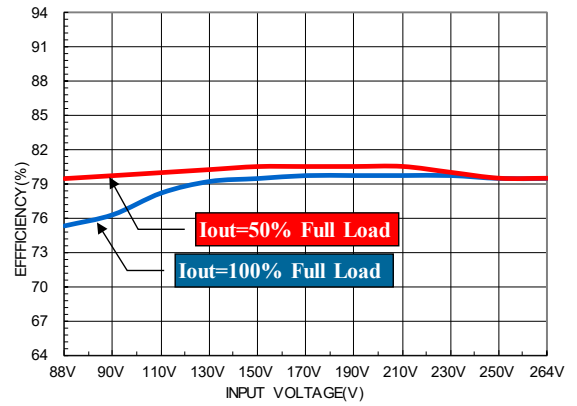


Derating Output Load versus Ambient Temperature

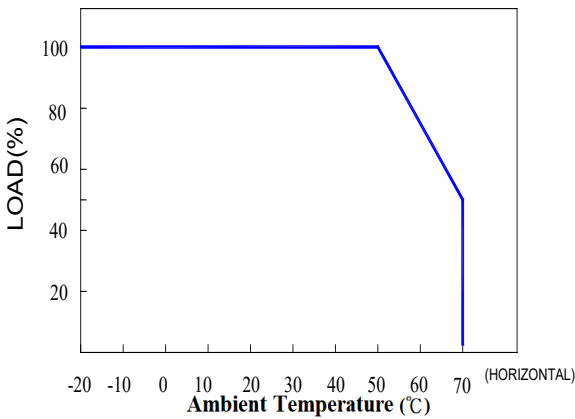


Derating Output Load versus Input Voltage

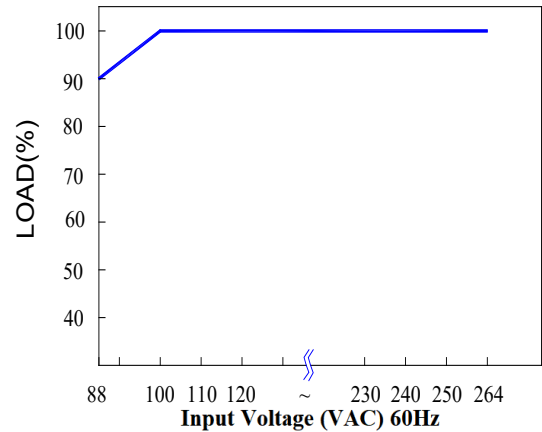

Typical Output Ripple and Noise at 115 Vin (with external capacitor; see datasheet)

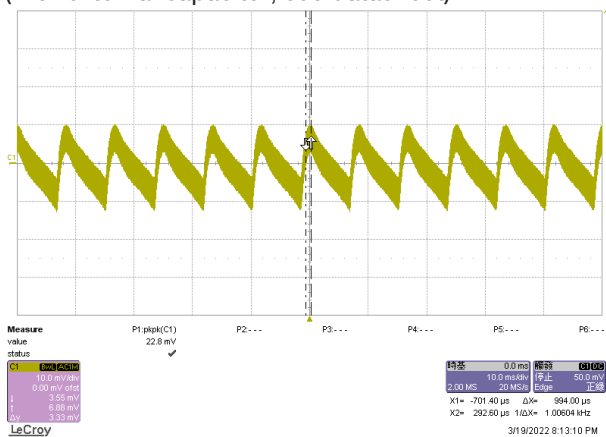


Typical Output Ripple and Noise at 230 Vin (with external capacitor; see datasheet)

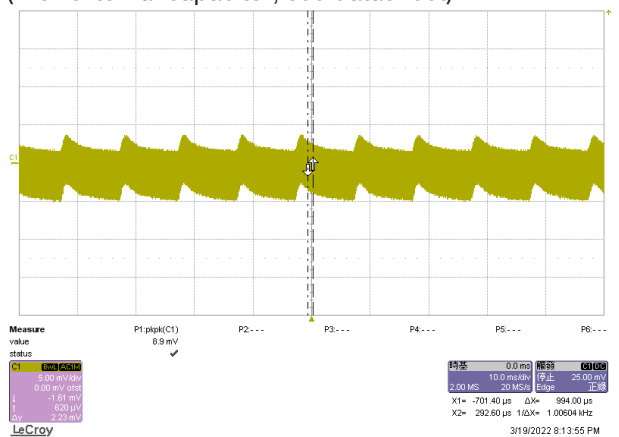


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

TXLN 025-105


Transient Response to Dynamic Load Change (25%) at 115 Vin

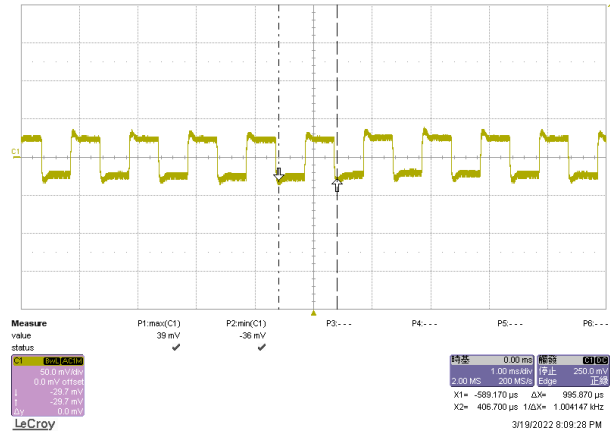


Transient Response to Dynamic Load Change (25%) at 230 Vin

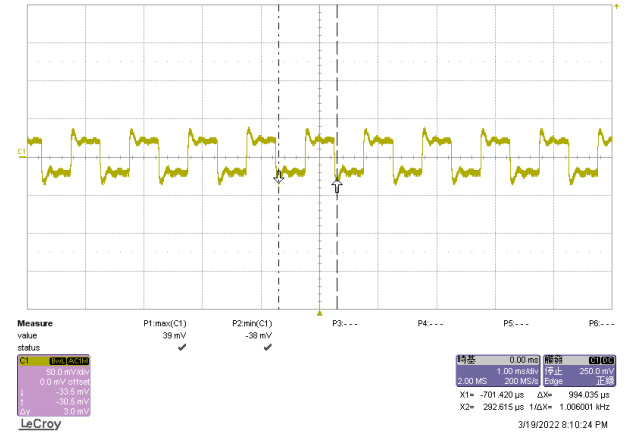


Typical Start-Up Characteristic at 115 Vin

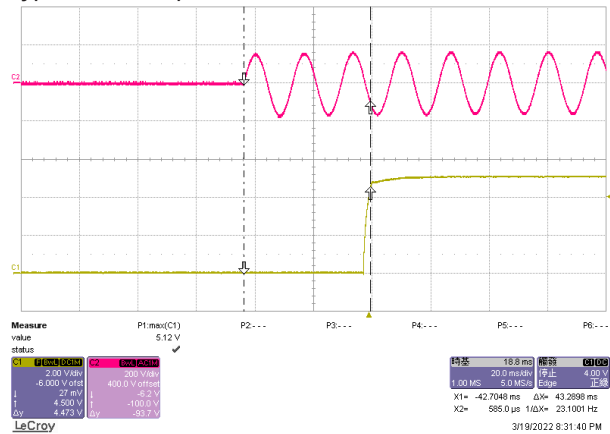


Typical Start-Up Characteristic at 230 Vin

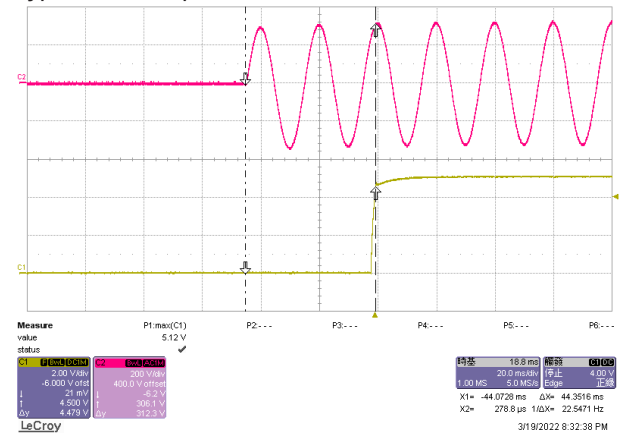

Typical Output Rise Characteristic at 115 Vin

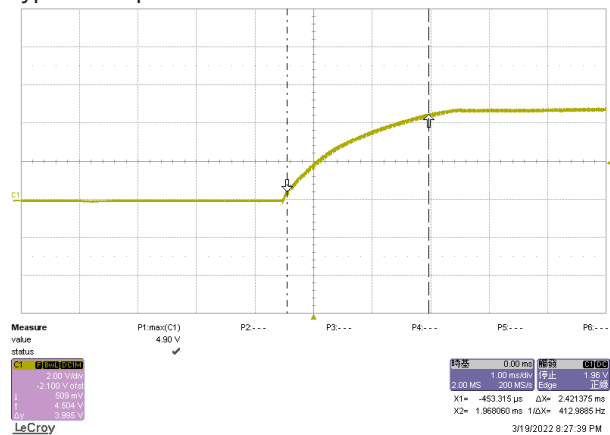


Typical Output Rise Characteristic at 230 Vin

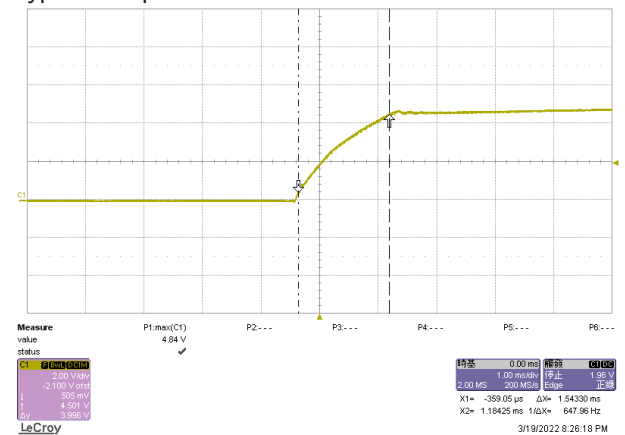


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

TXLN 025-105

Typical Hold-Up Characteristic at 115 Vin

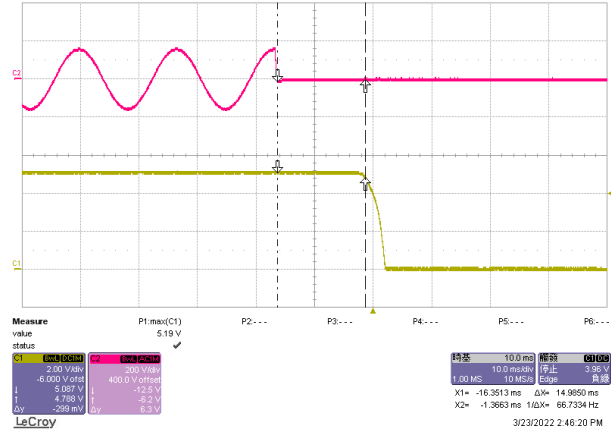


Typical Hold-Up Characteristic at 230 Vin

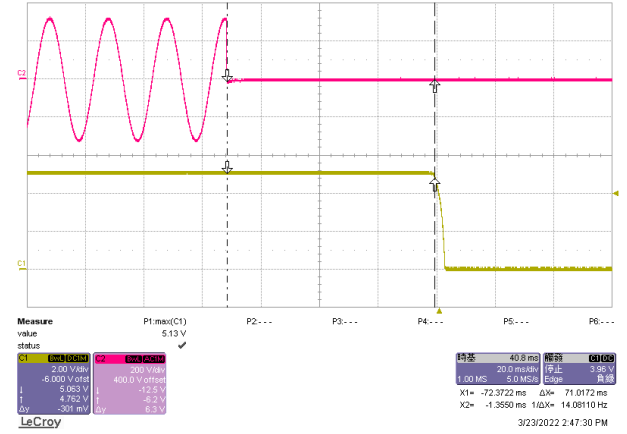


Optional model with 7.5 Vout


Efficiency versus Output Load

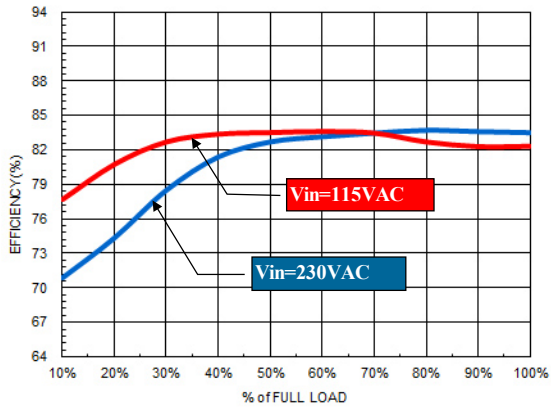


Efficiency versus Input Voltage

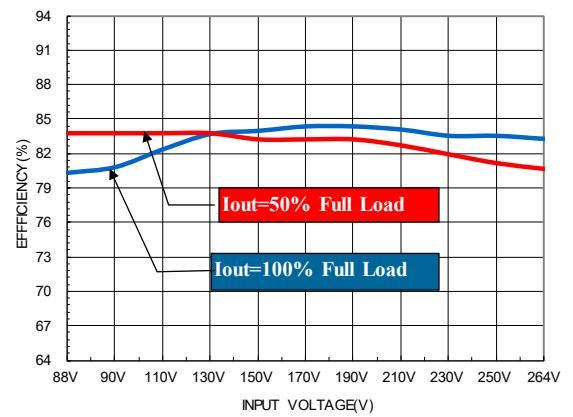


Derating Output Load versus Ambient Temperature

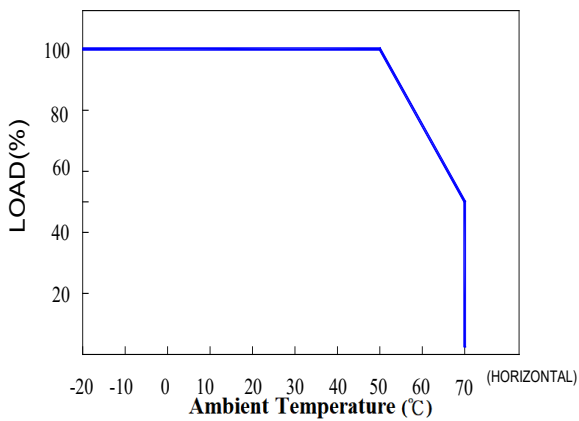


Derating Output Load versus Input Voltage

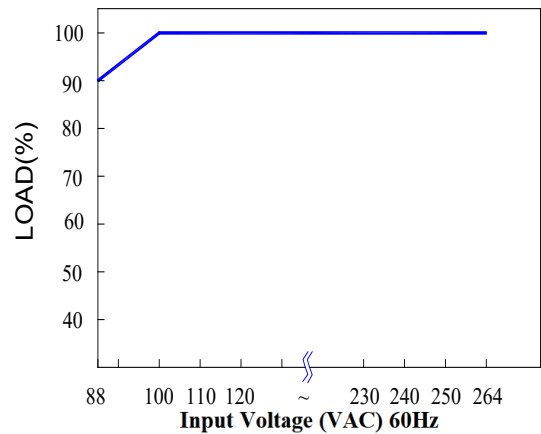

Typical Output Ripple and Noise at 115 Vin (with external capacitor; see datasheet)

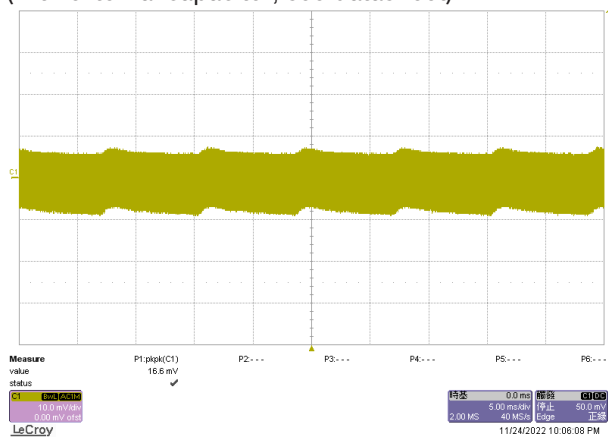


Typical Output Ripple and Noise at 230 Vin (with external capacitor; see datasheet)

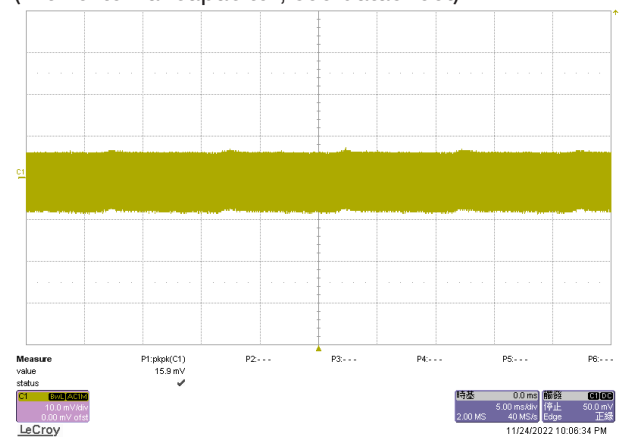


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Optional model with 7.5 Vout


Transient Response to Dynamic Load Change (25%) at 115 Vin

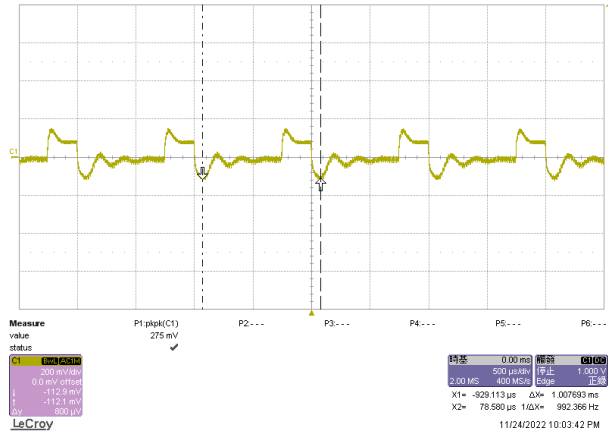


Transient Response to Dynamic Load Change (25%) at 230 Vin

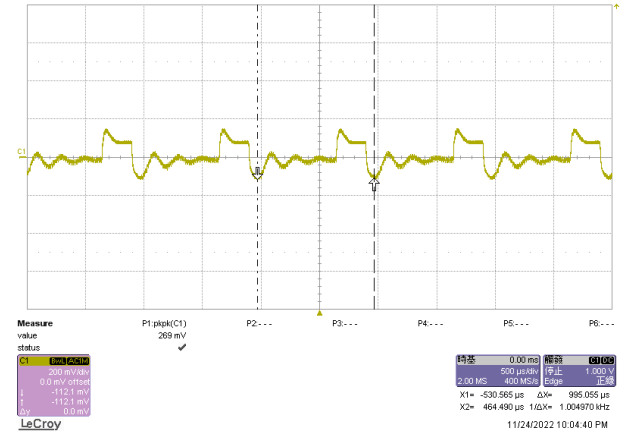


Typical Start-Up Characteristic at 115 Vin

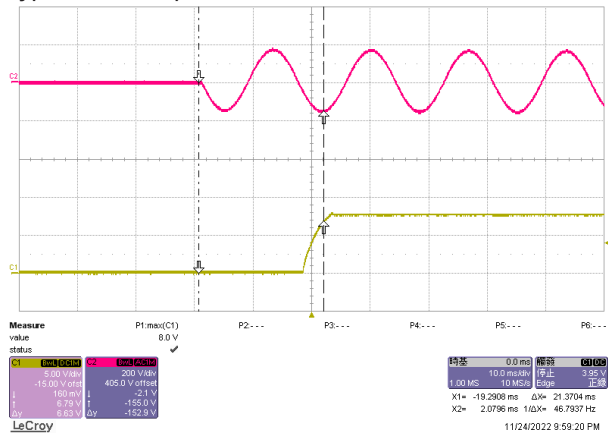


Typical Start-Up Characteristic at 230 Vin

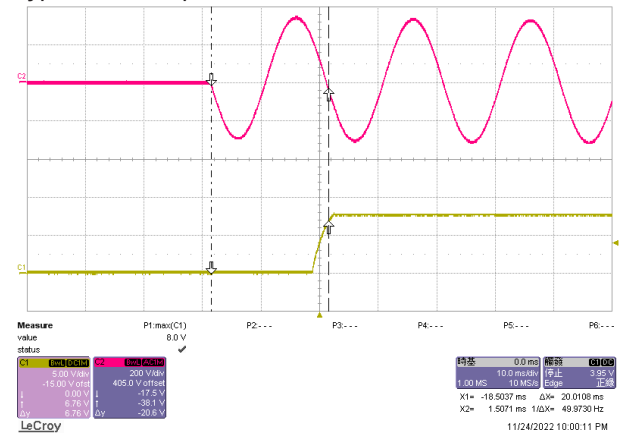

Typical Output Rise Characteristic at 115 Vin

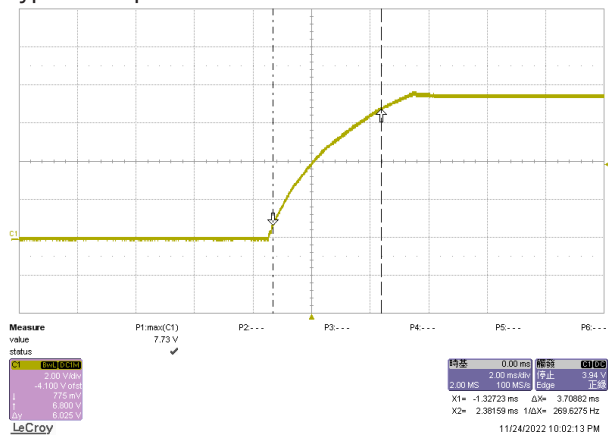


Typical Output Rise Characteristic at 230 Vin

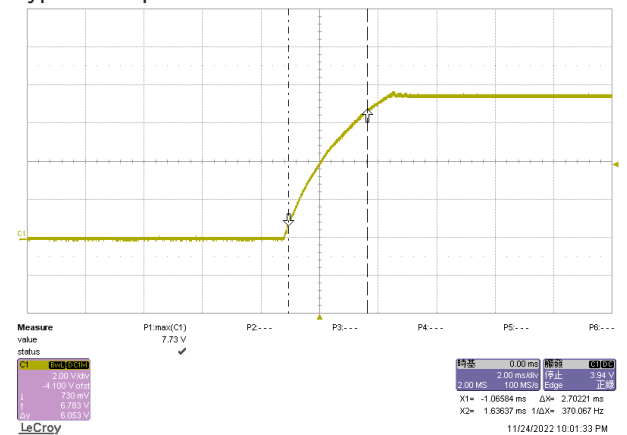


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Optional model with 7.5 Vout

Typical Hold-Up Characteristic at 115 Vin

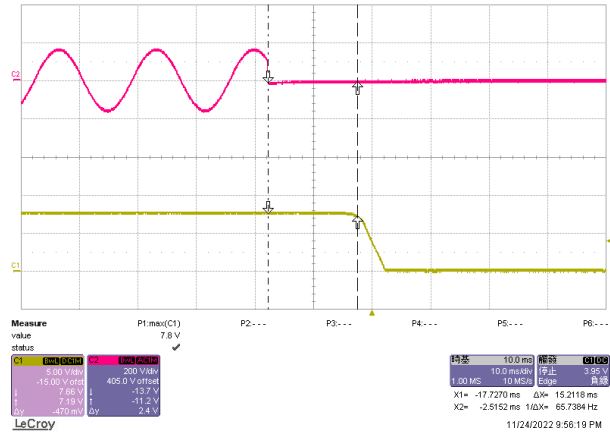


Typical Hold-Up Characteristic at 230 Vin

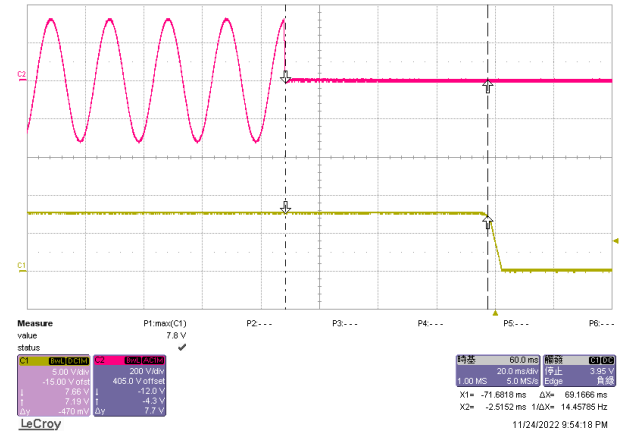


TXLN 025-112


Efficiency versus Output Load

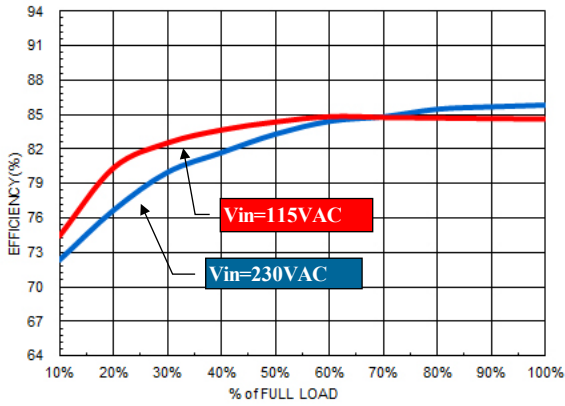


Efficiency versus Input Voltage

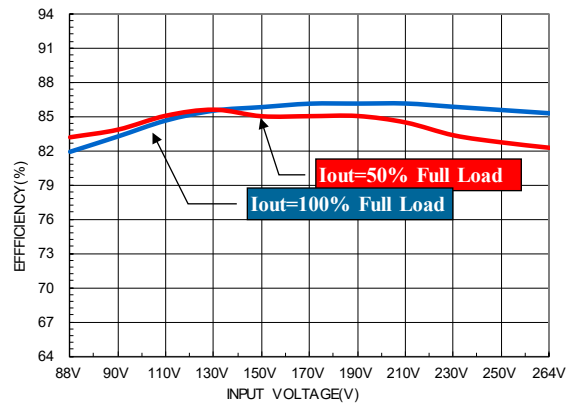


Derating Output Load versus Ambient Temperature

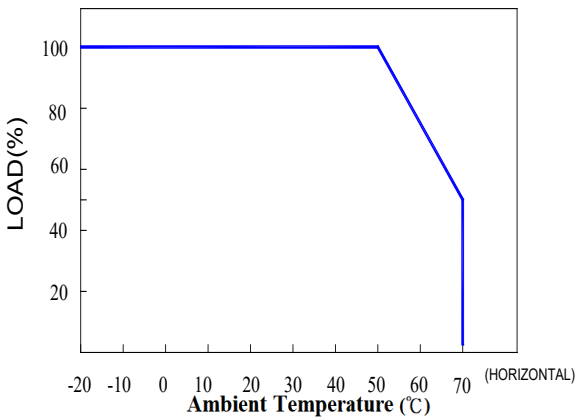


Derating Output Load versus Input Voltage

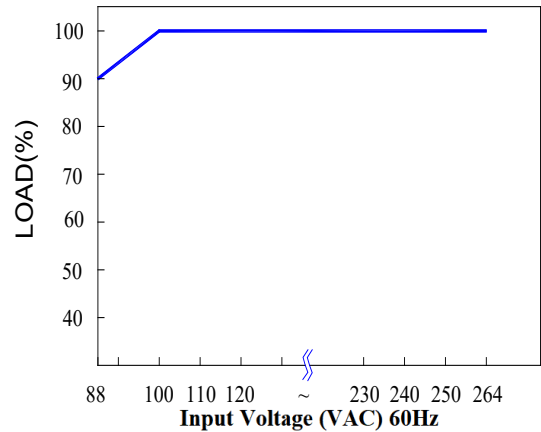

Typical Output Ripple and Noise at 115 Vin (with external capacitor; see datasheet)

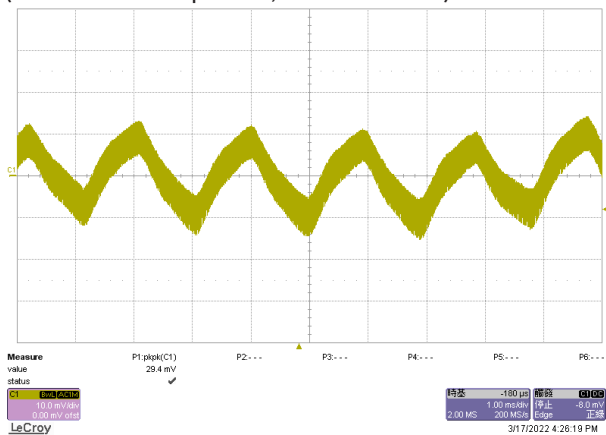


Typical Output Ripple and Noise at 230 Vin (with external capacitor; see datasheet)

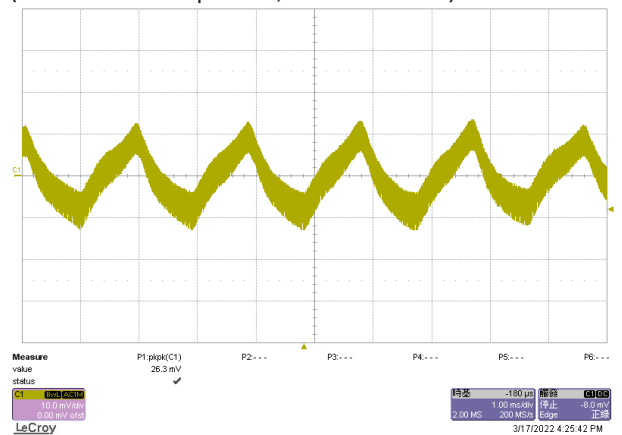


TXLN 025-112

Typical Hold-Up Characteristic at 115 Vin

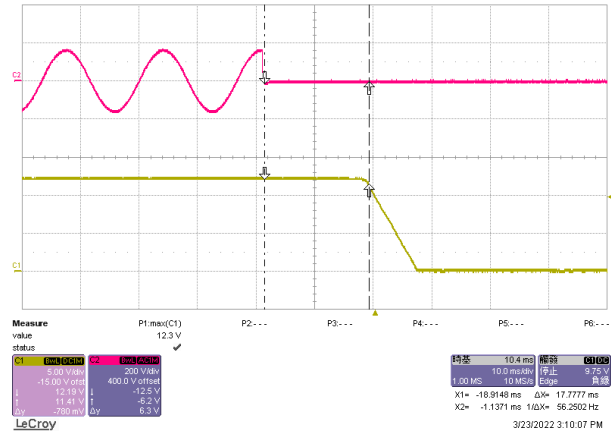


Typical Hold-Up Characteristic at 230 Vin

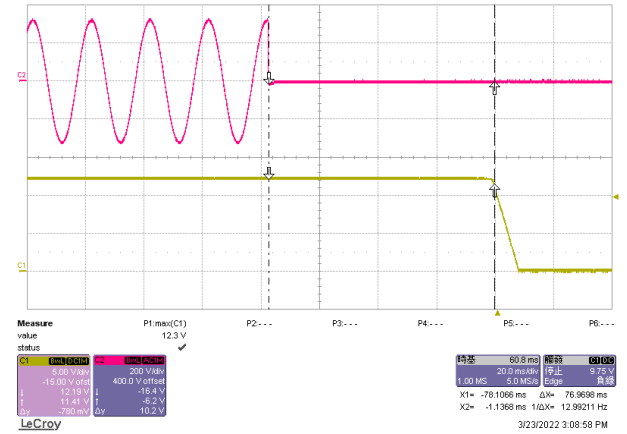


TXLN 025-115


Efficiency versus Output Load

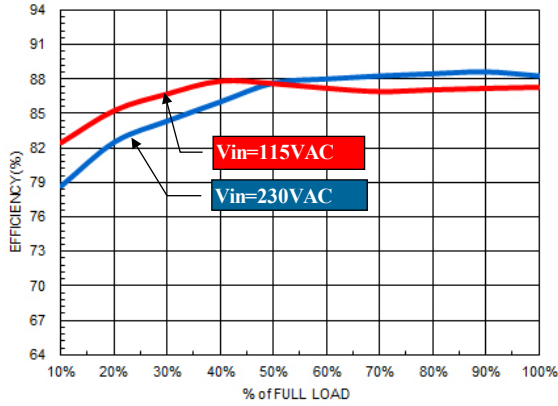


Efficiency versus Input Voltage

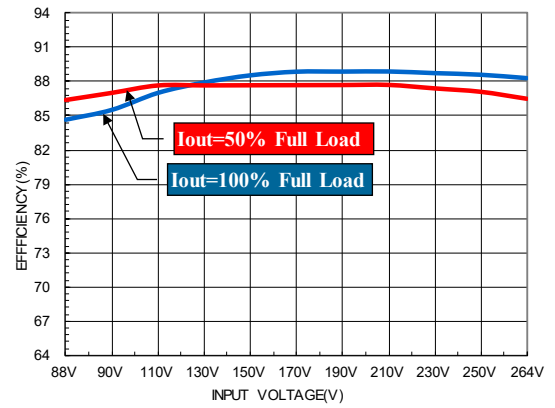


Derating Output Load versus Ambient Temperature

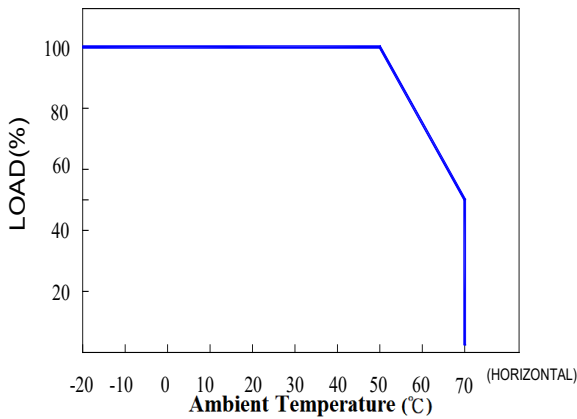


Derating Output Load versus Input Voltage

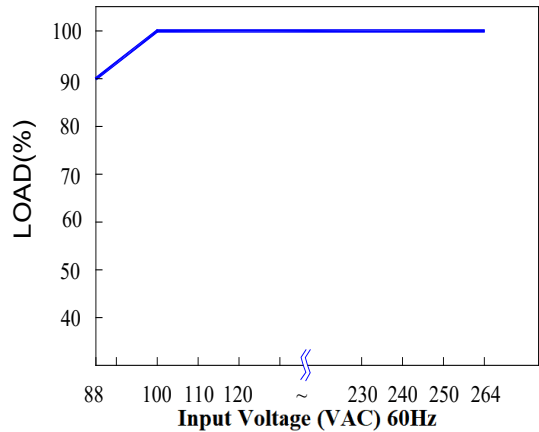

Typical Output Ripple and Noise at 115 Vin (with external capacitor; see datasheet)

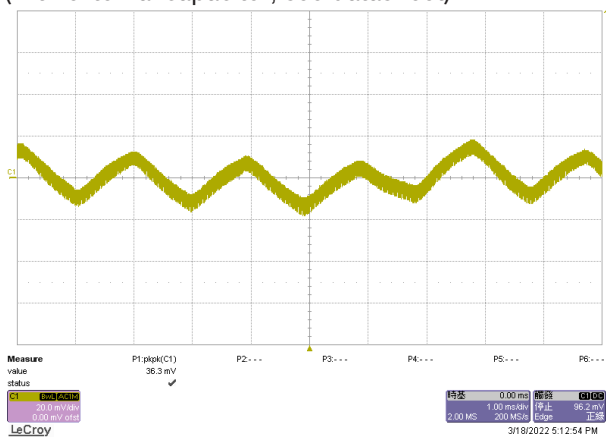


Typical Output Ripple and Noise at 230 Vin (with external capacitor; see datasheet)

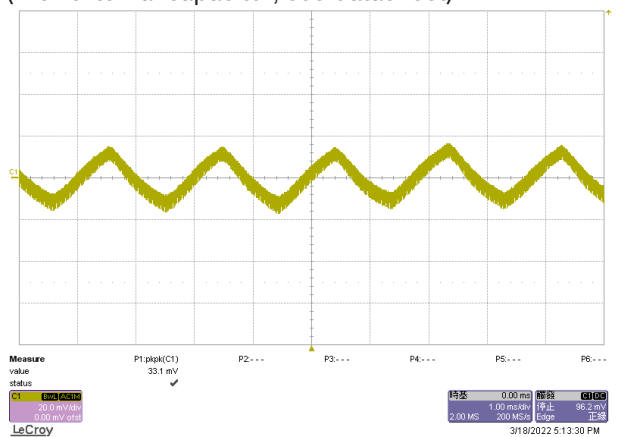


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

TXLN 025-115


Transient Response to Dynamic Load Change (25%) at 115 Vin

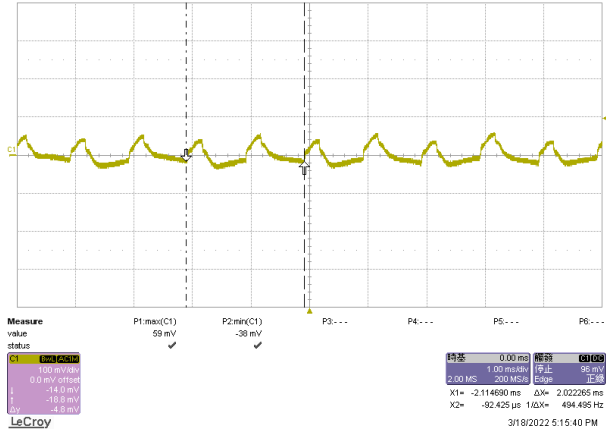


Transient Response to Dynamic Load Change (25%) at 230 Vin

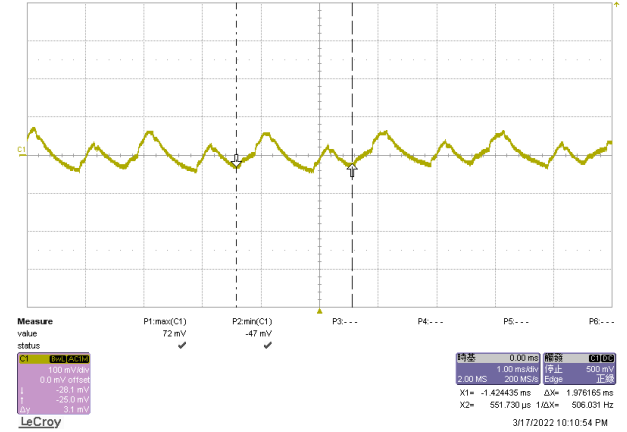


Typical Start-Up Characteristic at 115 Vin

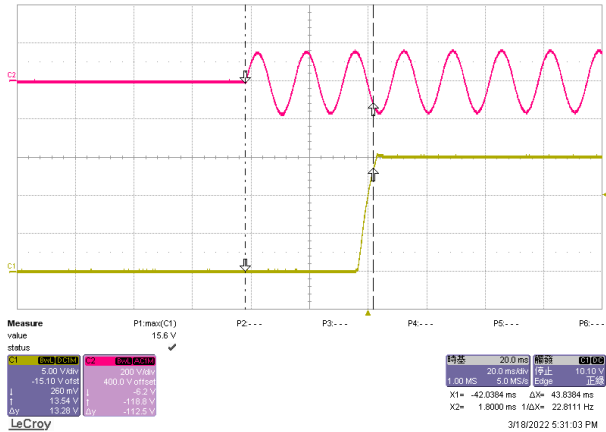


Typical Start-Up Characteristic at 230 Vin

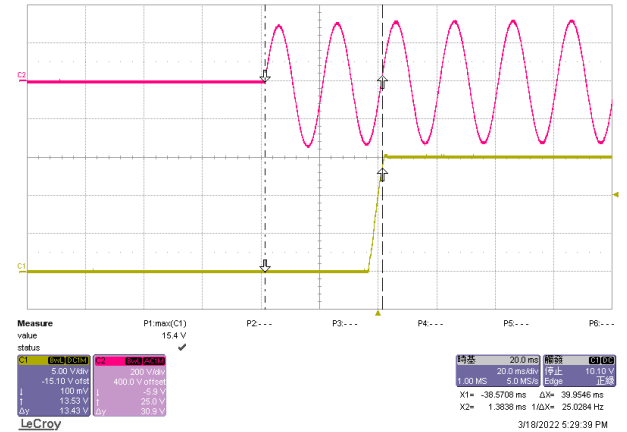

Typical Output Rise Characteristic at 115 Vin

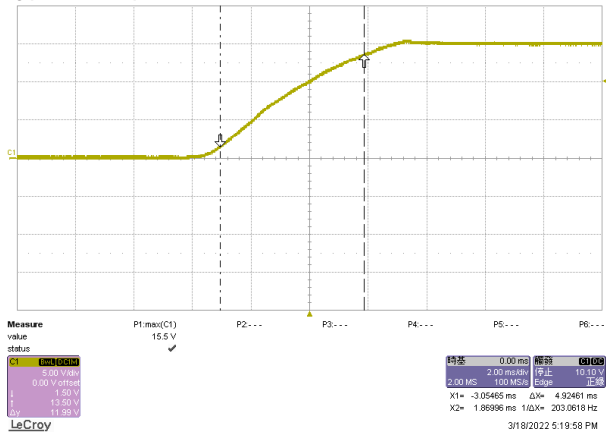


Typical Output Rise Characteristic at 230 Vin

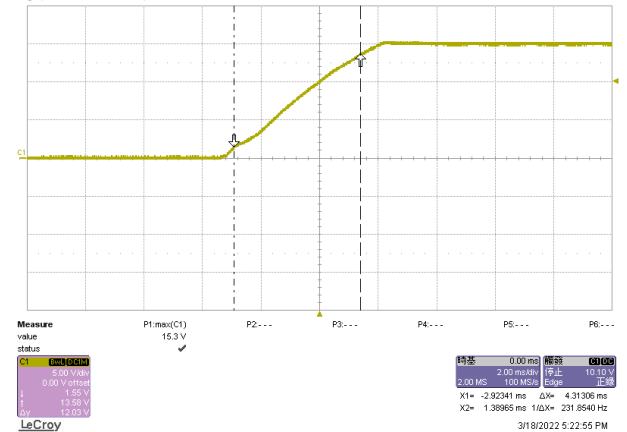


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

TXLN 025-115

Typical Hold-Up Characteristic at 115 Vin

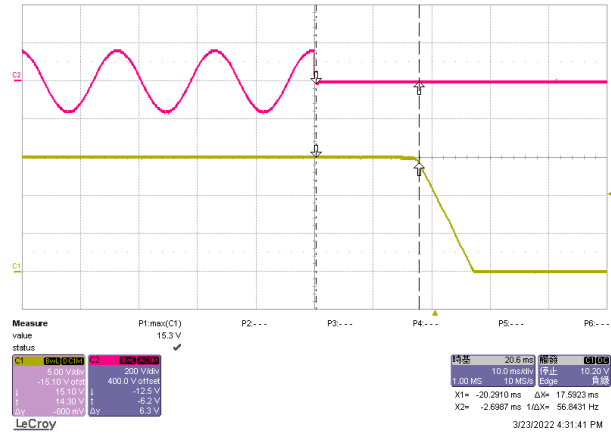


Typical Hold-Up Characteristic at 230 Vin

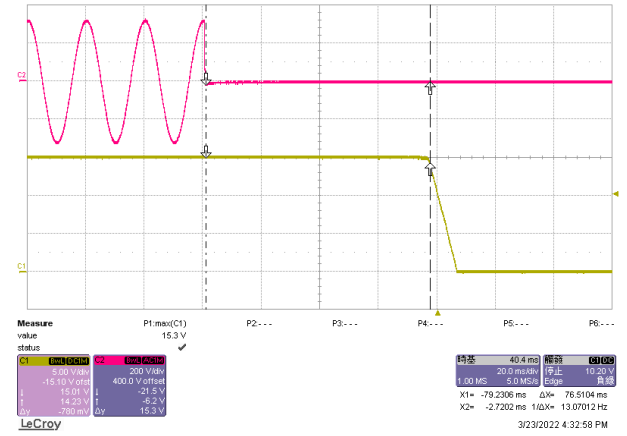


TXLN 025-124


Efficiency versus Output Load

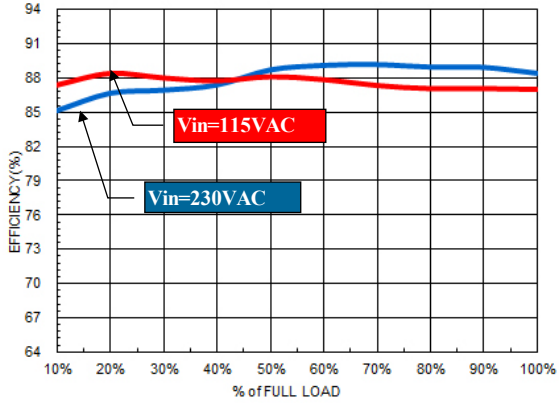


Efficiency versus Input Voltage

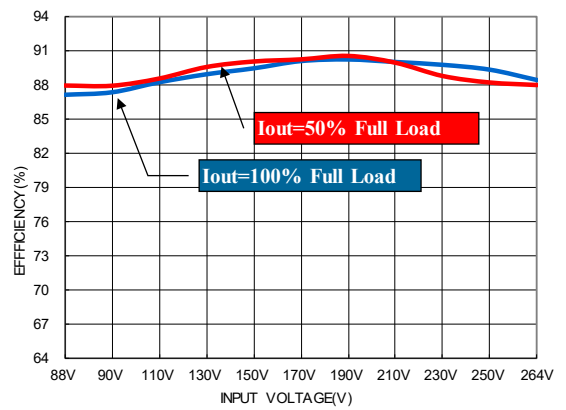


Derating Output Load versus Ambient Temperature

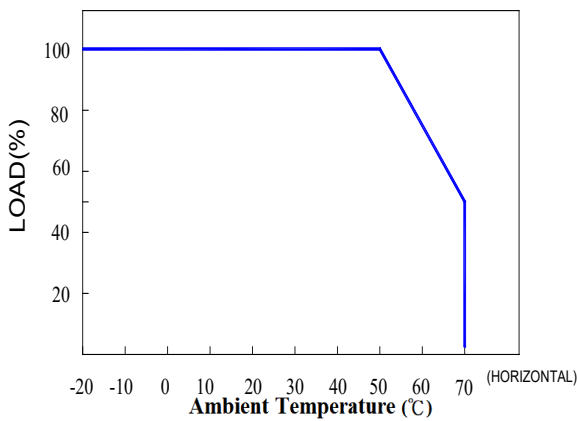


Derating Output Load versus Input Voltage

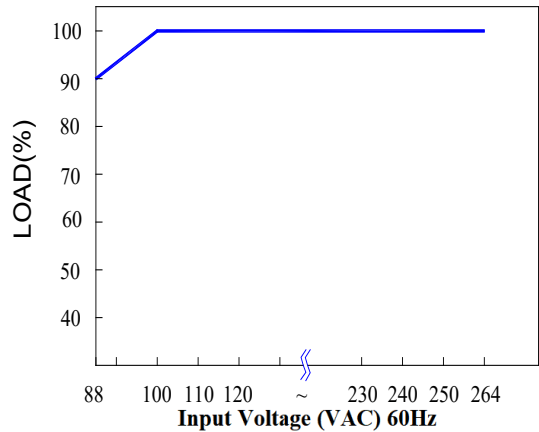

Typical Output Ripple and Noise at 115 Vin (with external capacitor; see datasheet)

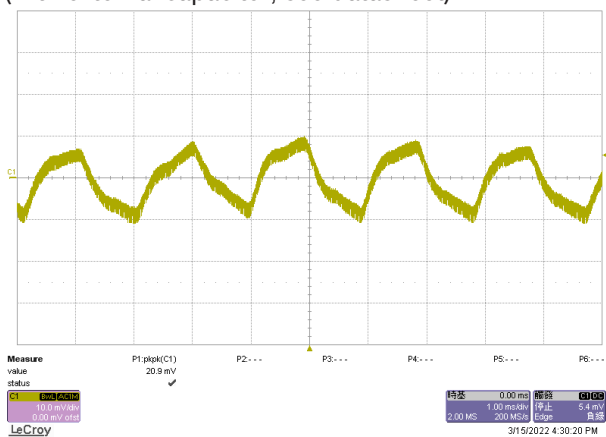


Typical Output Ripple and Noise at 230 Vin (with external capacitor; see datasheet)

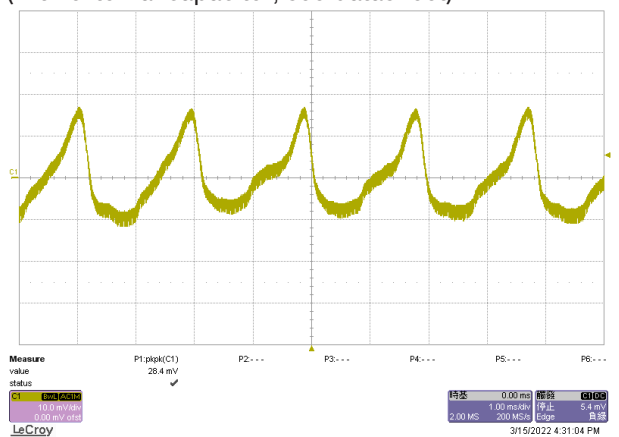


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

TXLN 025-124


Transient Response to Dynamic Load Change (25%) at 115 Vin

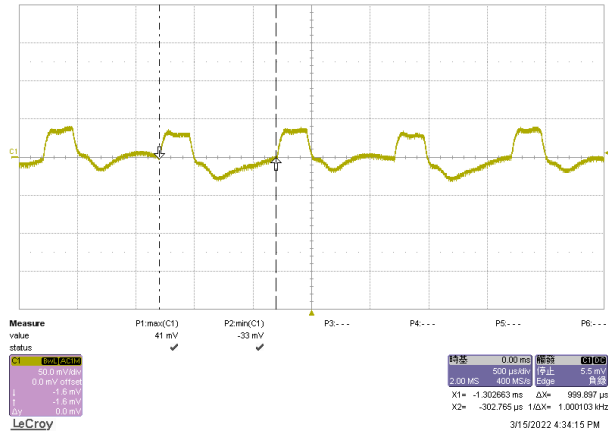


Transient Response to Dynamic Load Change (25%) at 230 Vin

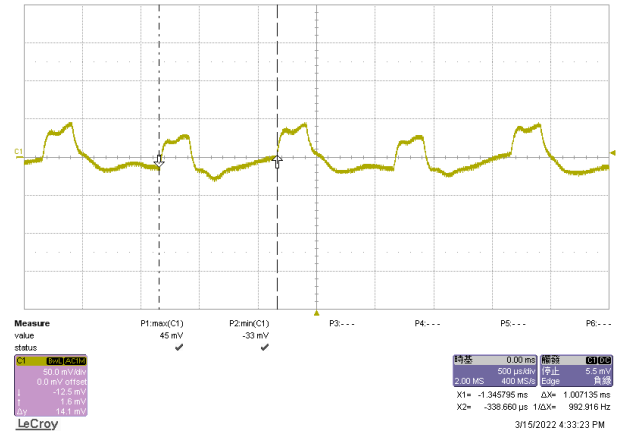


Typical Start-Up Characteristic at 115 Vin

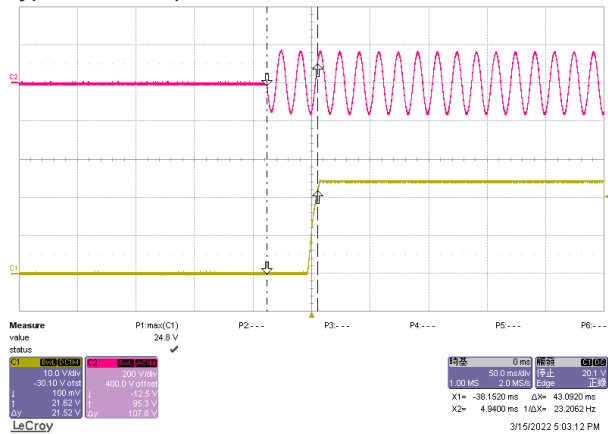


Typical Start-Up Characteristic at 230 Vin

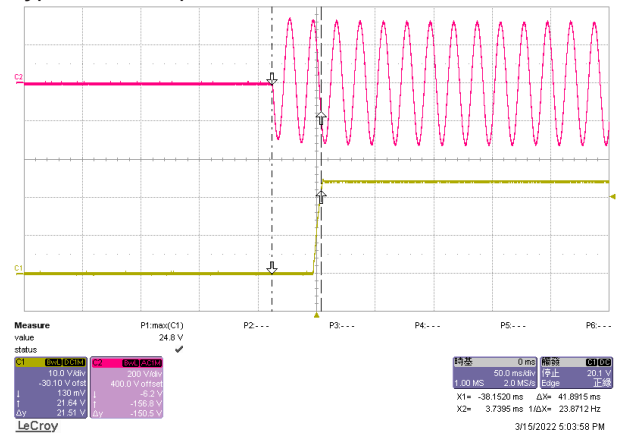

Typical Output Rise Characteristic at 115 Vin

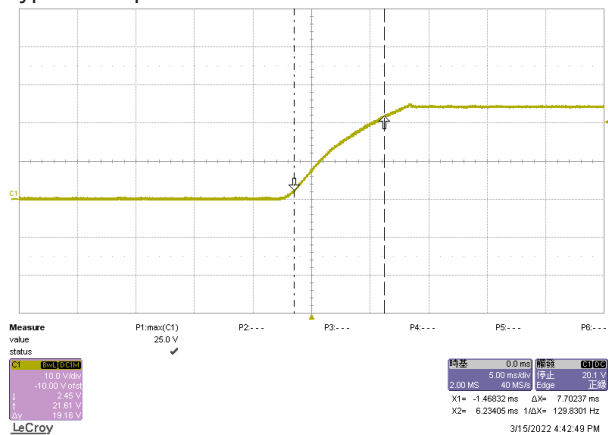


Typical Output Rise Characteristic at 230 Vin

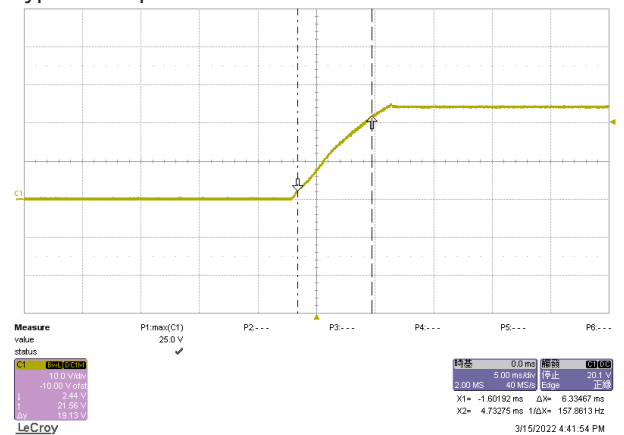


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

TXLN 025-124

Typical Hold-Up Characteristic at 115 Vin

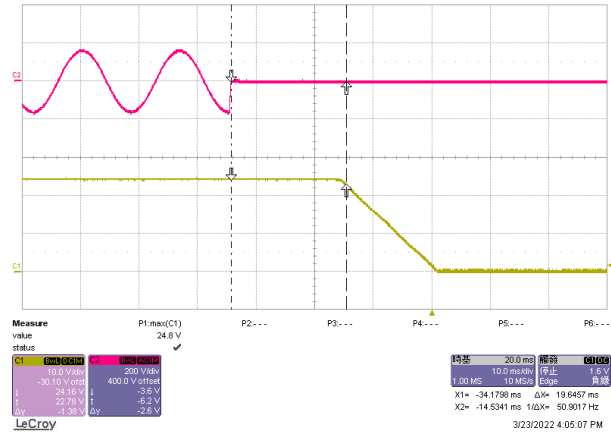


Typical Hold-Up Characteristic at 230 Vin

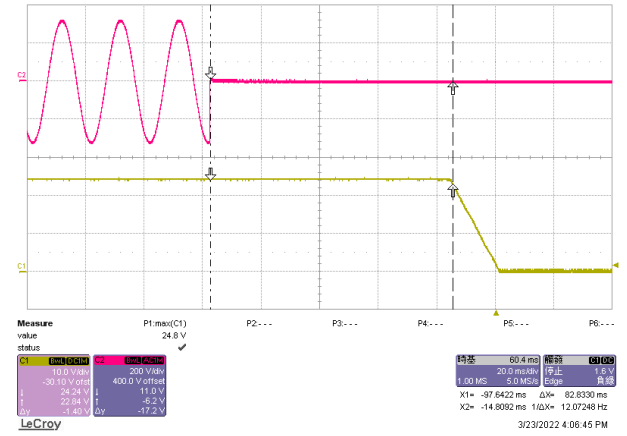


Optional model with 30 Vout


Efficiency versus Output Load

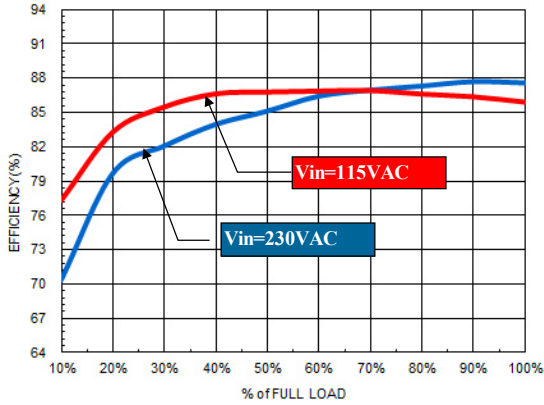


Efficiency versus Input Voltage

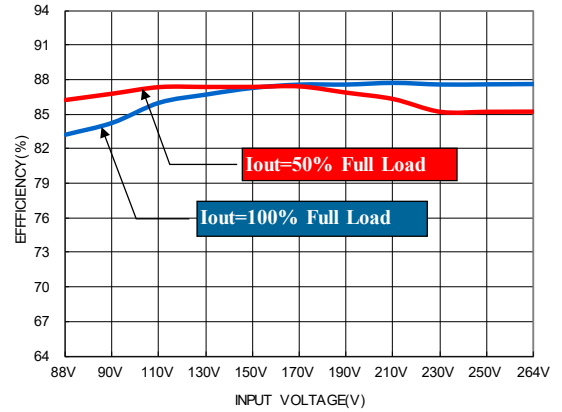


Derating Output Load versus Ambient Temperature

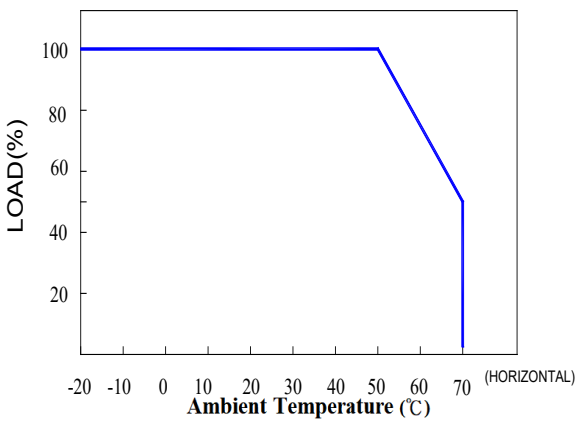


Derating Output Load versus Input Voltage

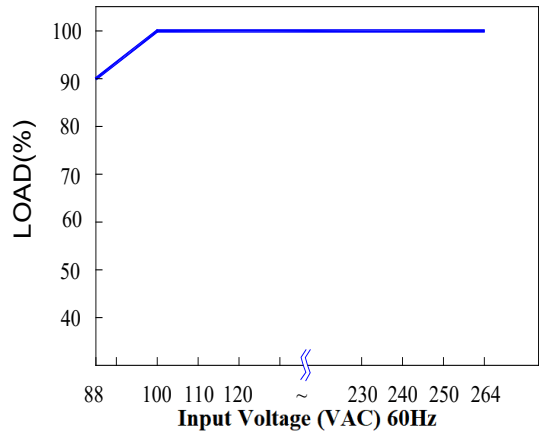

Typical Output Ripple and Noise at 115 Vin (with external capacitor; see datasheet)

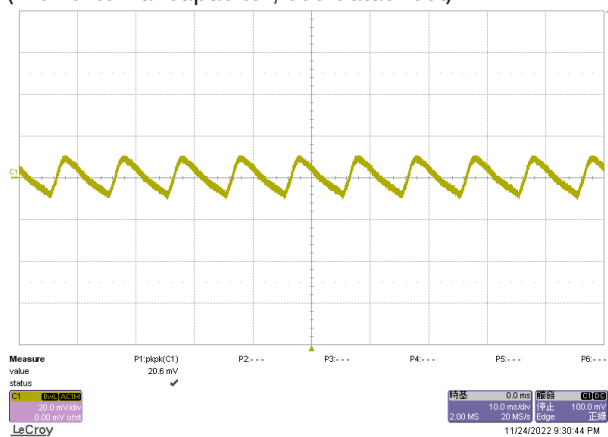


Typical Output Ripple and Noise at 230 Vin (with external capacitor; see datasheet)

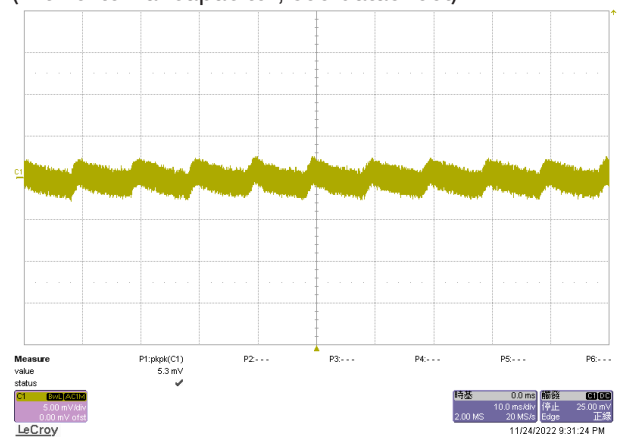


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Optional model with 30 Vout

Typical Hold-Up Characteristic at 115 Vin

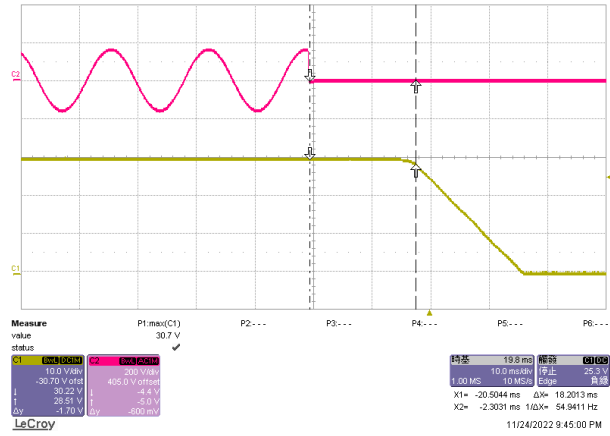


Typical Hold-Up Characteristic at 230 Vin

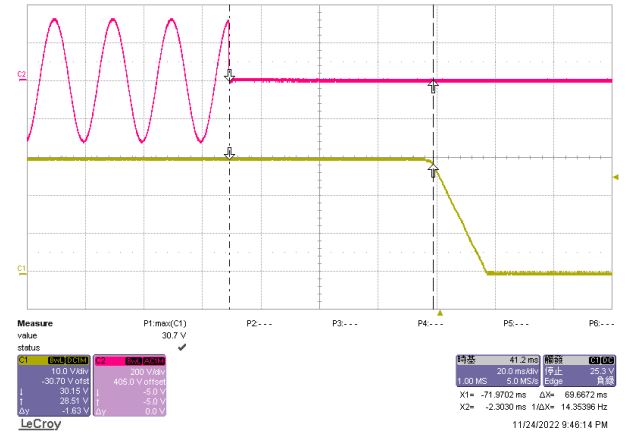


TXLN 025-148


Efficiency versus Output Load

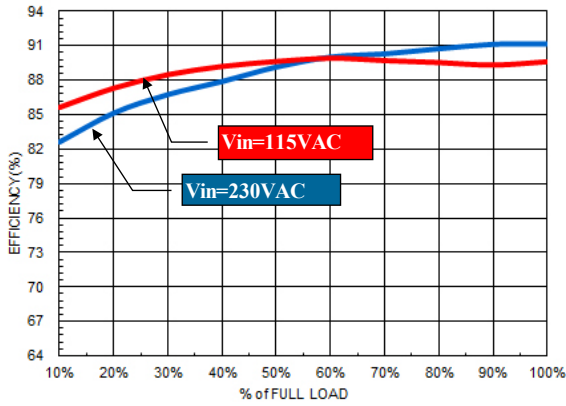


Efficiency versus Input Voltage

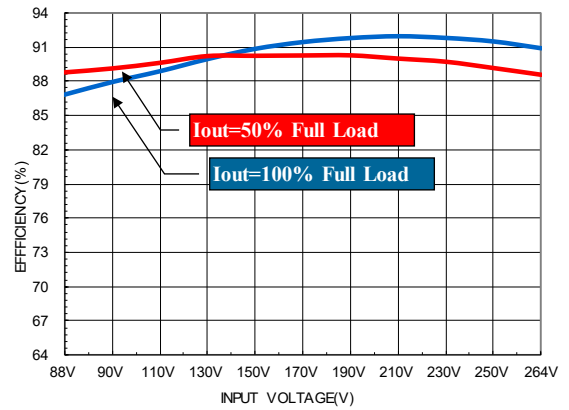


Derating Output Load versus Ambient Temperature

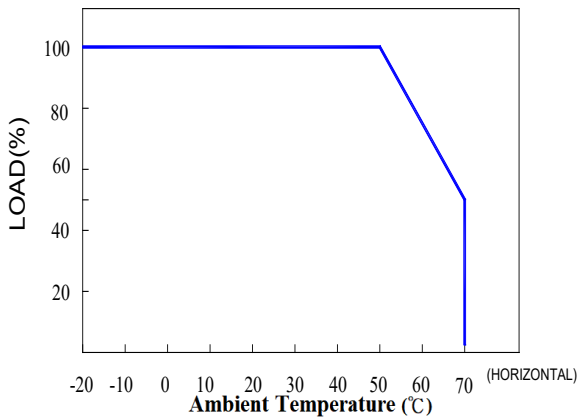


Derating Output Load versus Input Voltage

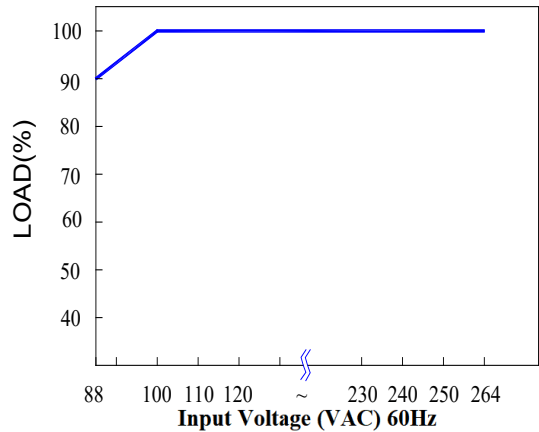

Typical Output Ripple and Noise at 115 Vin (with external capacitor; see datasheet)

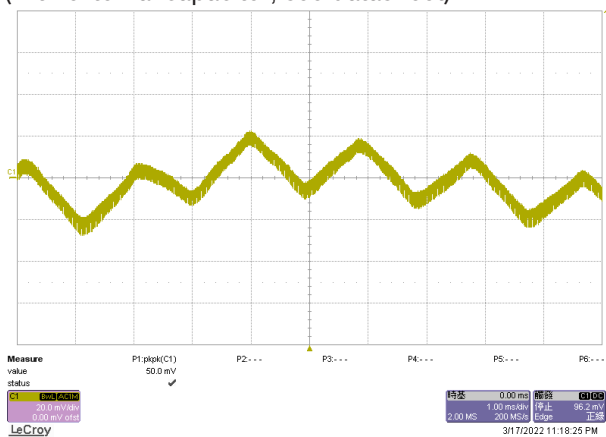


Typical Output Ripple and Noise at 230 Vin (with external capacitor; see datasheet)

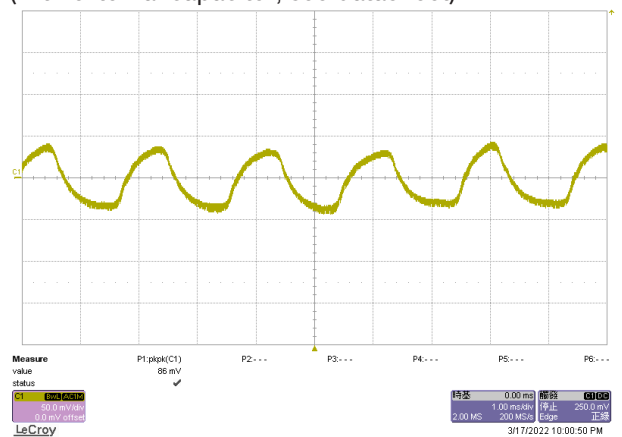


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

TXLN 025-148


Transient Response to Dynamic Load Change (25%) at 115 Vin

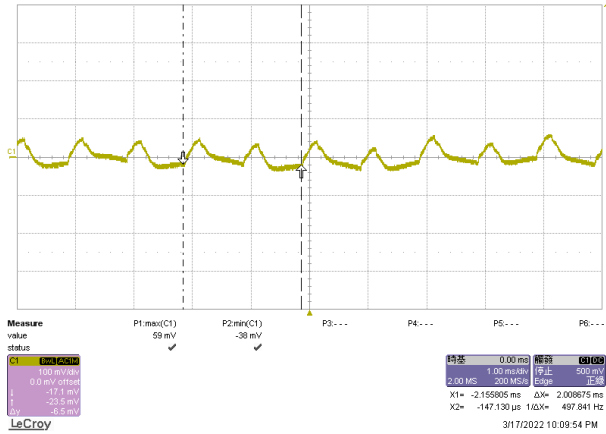


Transient Response to Dynamic Load Change (25%) at 230 Vin

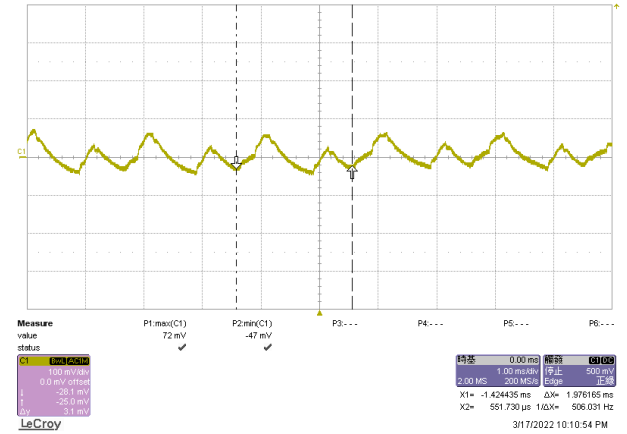


Typical Start-Up Characteristic at 115 Vin

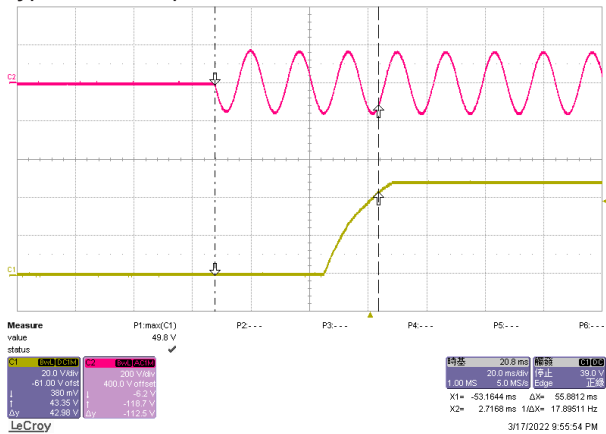


Typical Start-Up Characteristic at 230 Vin

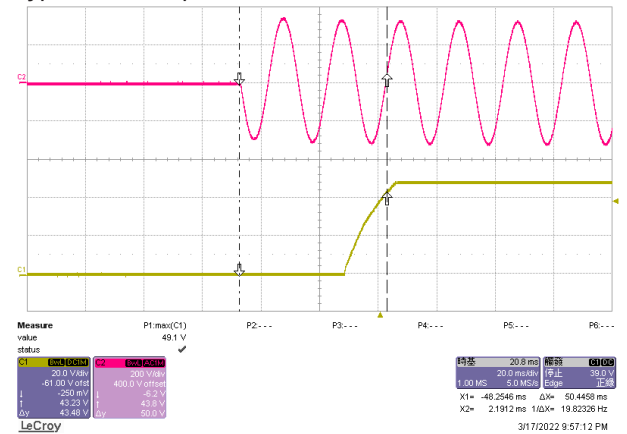

Typical Output Rise Characteristic at 115 Vin

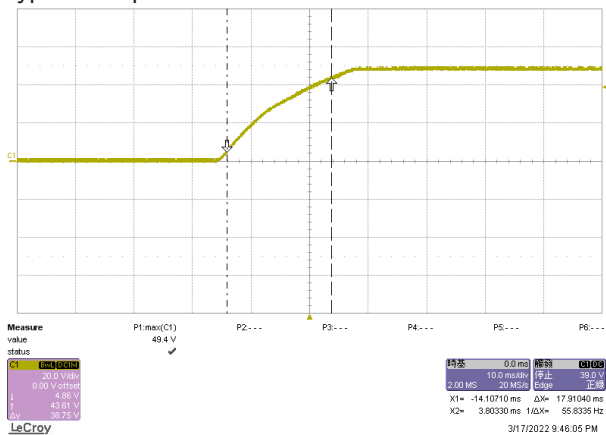

Typical Output Rise Characteristic at 230 Vin

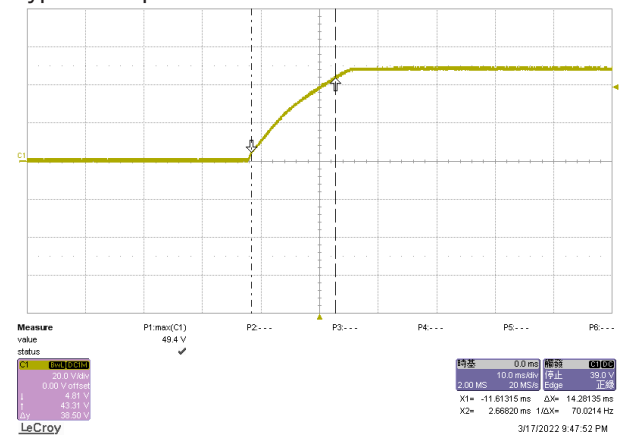

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

